



中国认可  
国际互认  
检测  
TESTING  
CNAS L6478



# TEST REPORT

**Reference No.**..... : WTF26F01002725W003  
**Applicant**..... : Mid Ocean Brands B.V.  
**Address**..... : Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.  
**Manufacturer** ..... : 120041  
**Address**..... : ---  
**Product Name**..... : TWS earbuds with charging case  
**Model No.**..... : MO6862  
**Test specification**..... : ETSI EN 301 489-1 V2.2.3 (2019-11)  
 ETSI EN 301 489-17 V3.2.4 (2020-09)  
**Date of Receipt sample** .... : 2026-01-15  
**Date of Test** ..... : 2026-01-15 to 2026-01-18  
**Date of Issue**..... : 2026-01-28  
**Test Report Form No.**..... : WEW-301489A-01B  
**Test Result**..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Foshan) Co., Ltd.**

Address: 1/F., Building 19, Sunlink Machinery City, Xingye 4 Road,  
 Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun,  
 Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:

Approved by:

Roy Hong

Danny Zhou



## 1 Test Summary

Emission				
Test	Test Requirement	Test Method	Class / Severity	Result
Conducted Emissions	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 55032	Table A.10 of EN 55032	N/A
Radiation Emission	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 55032	Table A.4 and Table A.5 of EN 55032	Pass
Harmonic Current Emissions	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-3-2	Clause 7 of EN 61000-3-2	N/A
Voltage Fluctuations and Flicker	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-3-3	Clause 5 of EN 61000-3-3	N/A
Immunity				
Test	Test Requirement	Test Method	Class / Severity	Result
Electrostatic Discharge (ESD)	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-2	±2/±4 kV Contact ±2/±4/±8 kV Air	Pass
Radio frequency electromagnetic field (80 MHz to 6 000MHz)	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-3	3V/m, 80%, 1kHz, Amp. Mod.	Pass
Fast Transients Common Mode (EFT)	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-4	AC±0.5/1.0kV	N/A
Surge	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-5	±1kV D.M.† ±2kV C.M.‡	N/A
RF common mode 0,15 MHz to 80 MHz (CS)	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-6	3Vrms(emf), 80%, 1kHz Amp. Mod.	N/A
Voltage Dips and Interruptions	ETSI EN 301 489-17 V3.2.4	ETSI EN 301 489-1 V2.2.3 EN 61000-4-11	0 % UT* for 0.5per 0 % UT* for 1per 70 % UT* for 25per 0 % UT* for 250per	N/A

Remark:

- Pass Test item meets the requirement  
 Fail Test item does not meet the requirement  
 N/A Test case does not apply to the test object  
 A.M Amplitude Modulation  
 † Differential Mode  
 ‡ Common Mode  
 \*  $U_T$  is the nominal supply voltage



## 2 Contents

	Page
<b>1 TEST SUMMARY</b> .....	<b>2</b>
<b>2 CONTENTS</b> .....	<b>3</b>
<b>3 GENERAL INFORMATION</b> .....	<b>4</b>
3.1 GENERAL DESCRIPTION OF E.U.T. ....	4
3.2 DETAILS OF E.U.T. ....	4
3.3 DESCRIPTION OF SUPPORT UNITS .....	4
3.4 STANDARDS APPLICABLE FOR TESTING.....	4
3.5 TEST FACILITY.....	4
3.6 SUBCONTRACTED.....	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
<b>4 EQUIPMENT USED DURING TEST</b> .....	<b>6</b>
4.1 EQUIPMENT LIST .....	6
4.2 SOFTWARE LIST.....	8
4.3 MEASUREMENT UNCERTAINTY .....	8
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....	9
4.5 DECISION RULE .....	9
<b>5 EMC REQUIREMENTS FOR EMISSIONS</b> .....	<b>10</b>
5.1 RADIATED EMISSION .....	10
<b>6 EMC REQUIREMENT FOR IMMUNITY</b> .....	<b>16</b>
6.1 PERFORMANCE CRITERIA .....	16
6.2 ELECTROSTATIC DISCHARGE(ESD).....	17
6.3 RF ELECTROMAGNETIC FIELD (80MHZ TO 6 000MHZ) (RS).....	19
<b>7 PHOTOGRAPHS - TEST SETUP</b> .....	<b>21</b>
7.1 PHOTOGRAPH - RADIATED EMISSIONS TEST SETUP .....	21
7.2 PHOTOGRAPH - RF ELECTROMAGNETIC FIELD TEST SETUP .....	22
7.3 PHOTOGRAPH - ESD TEST SETUP.....	22
<b>8 PHOTOGRAPHS – EUT CONSTRUCTIONAL DETAILS</b> .....	<b>23</b>



### 3 General Information

#### 3.1 General Description of E.U.T.

**Product Name** ..... : TWS earbuds with charging case

**Model No.** ..... : MO6862

**Remark** ..... : ---

#### 3.2 Details of E.U.T.

**Technical Data** ..... : Earbud battery: 3.7V, 25mAh  
Charger box input: DC 5V  
Charger box battery: 3.7V, 200mAh

#### 3.3 Description of Support Units

The EUT has been tested as an independent unit. MO6862 is the test sample. The full tests were performed in the condition of battery 3.7V input.

#### 3.4 Standards Applicable for Testing

The tests were performed according to following standards:

ETSI EN 301 489-1 V2.2.3 (2019-11) ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonised Standard for ElectroMagnetic Compatibility

ETSI EN 301 489-17 V3.2.4 (2020-09) ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for Broadband Data Transmission Systems; Harmonised Standard for ElectroMagnetic Compatibility

#### 3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895.

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106.

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



### 3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes  No

If Yes, list the related test items and lab information:

Test items: ---

Lab information:---

### 3.7 Abnormalities from Standard Conditions

None.

# WALTEK



## 4 Equipment Used during Test

### 4.1 Equipment List

<input type="checkbox"/> Mains Terminal Disturbance Voltage 1#(Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Test Receiver	R&S	ESR3	102423	2026-01-04	2027-01-03
2.	LISN	R&S	ENV216	101343	2026-01-04	2027-01-03
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	2026-01-04	2027-01-03
4.	Switch	CD	RSU-A4	RSUA4008	2026-01-04	2027-01-03
<input type="checkbox"/> Mains Terminal Disturbance Voltage 2#(Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	2026-01-04	2027-01-03
2.	LISN	R&S	ENV216	101215	2026-01-04	2027-01-03
3.	Cable 22	Times Microwave Systems	LMR195UF-BMNM-5.00M	---	2026-01-04	2027-01-03
4.	Switch	ESE	RSU/M2	---	2026-01-04	2027-01-03
<input type="checkbox"/> Mains Terminal Disturbance Voltage 3#(Conducted Emission)						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMI Test Receiver	R&S	ESR3	102842	2026-01-04	2027-01-03
2.	LISN	R&S	ENV216	101542	2026-01-04	2027-01-03
3.	Cable 12	YIHENG	LMR195UF-NMNM-2.5	---	2026-01-04	2027-01-03
4.	Manual RF Switch	Top Precision	SW-2	RSU0402	2026-01-04	2027-01-03
<input checked="" type="checkbox"/> Radiated Emission (30MHz to 1GHz) 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	---	2024-01-05	2027-01-04
2.	EMI Test Receiver	R&S	ESR7	101566	2026-01-04	2027-01-03
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	2026-01-04	2027-01-03
4.	Cable 20	Times Microwave Systems	RG223-NMNM-10M	---	2026-01-04	2027-01-03
5.	Cable 21	Times Microwave Systems	RG223-NMNM-3M	---	2026-01-04	2027-01-03
<input type="checkbox"/> Radiated Emission (30MHz to 1GHz) 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	YIHENG	9m×6m×6m	YH2021071801	2024-01-06	2027-01-05
2.	EMI Test Receiver	R&S	ESR7	102454	2026-01-04	2027-01-03
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	01418	2026-01-04	2027-01-03
4.	Cable 14	YIHENG	LMR240UF-NMSM-7.5	---	2026-01-04	2027-01-03



<input checked="" type="checkbox"/> Radiated Emission (1GHz to 6GHz) 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	2024-01-05	2027-01-04
2.	EMI Test Receiver	R&S	ESR7	101566	2026-01-04	2027-01-03
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	2026-01-04	2027-01-03
4.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	2026-01-04	2027-01-03
5.	Preamplifier	Lunar E M	LNA1G18-40	20160501002	2026-01-04	2027-01-03
<input type="checkbox"/> Radiated Emission (1GHz to 6GHz) 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	3m Semi-anechoic Chamber	YIHENG	9m×6m×6m	YH2021071801	2024-01-06	2027-01-05
2.	EMI Test Receiver	R&S	ESR7	102454	2026-01-04	2027-01-03
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA9120D	02465	2026-01-04	2027-01-03
4.	Coaxial Cable (above 1GHz)	Times-Microwave Systems	SFT205-NMSM-7	-	2026-01-04	2027-01-03
5.	Preamplifier	Tonscend	TAP0118045	AP21J806168	2026-01-04	2027-01-03
<input type="checkbox"/> Harmonics and Flicker Measuring System						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	Harmonics and Flicker Measuring System	YUANFANG	HFM-3000	V200	2026-01-04	2027-01-03
<input checked="" type="checkbox"/> ESD						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	ESD Simulator	TESEQ	NSG437	521	2026-01-04	2027-01-03
<input type="checkbox"/> EFT & Voltage Dips and Interruptions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	EMS test system	TESEQ	NSG3040	1858	2026-01-04	2027-01-03
2.	Step transformer	TESEQ	INA6501	206	2026-01-04	2027-01-03
3.	Coupling clamp	TESEQ	CDN8014	31405	2026-01-04	2027-01-03
<input type="checkbox"/> Surge						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	Surge Simulator	TESEQ	NSG3060	1395	2026-01-04	2027-01-03
<input type="checkbox"/> Injected Currents						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	Conducted Immunity test system	TESEQ	NSG4070	45345	2026-01-04	2027-01-03
2.	CDN	TESEQ	CDN M016	31586	2026-01-04	2027-01-03
3.	EM Clamp	TESEQ	KEMZ801	32362	2026-01-04	2027-01-03
4.	6dB Attenuator	TESEQ	ATN6075	32122	2026-01-04	2027-01-03



☒ Radio-frequency electromagnetic fields						
Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1.	RF Power Amplifier	MICOTOP	MPA-80-1000-250	MPA2405139	2026-01-04	2027-01-03
2.	RF Power Amplifier	MICOTOP	MPA-1000-6000-100	MPA2405140	2026-01-04	2027-01-03
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	2026-01-04	2027-01-03
4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	2026-01-04	2027-01-03
5.	Analog signal generator	RS	SMB100A	105566	2026-01-04	2027-01-03
6.	Power meter	RS	NRP6A	101133	2026-01-04	2027-01-03
7.	Power meter	RS	NRP6A	101134	2026-01-04	2027-01-03

: Not Used

: Used

## 4.2 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-CON	FARAD-3A1.1+
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	EMC-CON 3A1.1+
EMI Test Software (Radiated Emission 1#)	FARATRONIC	EZ-EMC	RA-03A1-2
EMI Test Software (Radiated Emission 2#)	FARATRONIC	EZ-EMC	RA-03A1-2
Harmonics and Flicker Test Software	YUANFANG	HFM-3000	V2.00.147
Radiated Immunity Test Software	Chinese EMC	EMS	V1.0.0.0

## 4.3 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conducted Emission	150kHz~30MHz	±2.6dB	(1)
Radiated Emission	30MHz~1GHz	±4.5dB	(1)
Radiated Emission	1GHz~6GHz	±4.5dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



#### 4.4 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.	Serial No.
1.	/	/	/	/	/

#### 4.5 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

**If  $U_{LAB}$  is less than or equal to  $U_{cispr}$ , then**

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

**If  $U_{LAB}$  is greater than  $U_{cispr}$ , then**

- Compliance is deemed to occur if no measured disturbance level, increased by  $(U_{LAB} - U_{cispr})$ , exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{LAB} - U_{cispr})$ , exceeds the disturbance limit.

# WALTEK



## 5 EMC Requirements for Emissions

### 5.1 Radiated Emission

<b>Test Requirement</b> .....	ETSI EN 301 489-17
<b>Test Method</b> .....	ETSI EN 301 489-1, EN 55032, Class B
<b>Frequency Range</b> .....	30MHz to 1GHz, 1GHz to 6GHz
<b>Class/Severity</b> .....	Class B/ Table A.4 and A.5 of EN 55032
<b>Detector</b> .....	Peak for pre-scan (120kHz Resolution Bandwidth Below 1GHz; 1MHz Resolution Bandwidth Above 1GHz)

#### 5.1.1 EUT Operation:

##### Operating Environment:


<b>Temperature</b> .....	22.4°C
<b>Humidity</b> .....	51.3%RH
<b>Atmospheric Pressure</b> .....	101.2kPa

##### EUT Operation:

<b>Input Voltage</b> .....	Battery 3.7V
<b>Operating Mode</b> .....	BT connected mode


#### 5.1.2 Test Setup

The radiated emission tests were performed using the setup accordance with the EN 55032.  
Frequency Range: Below 1 GHz

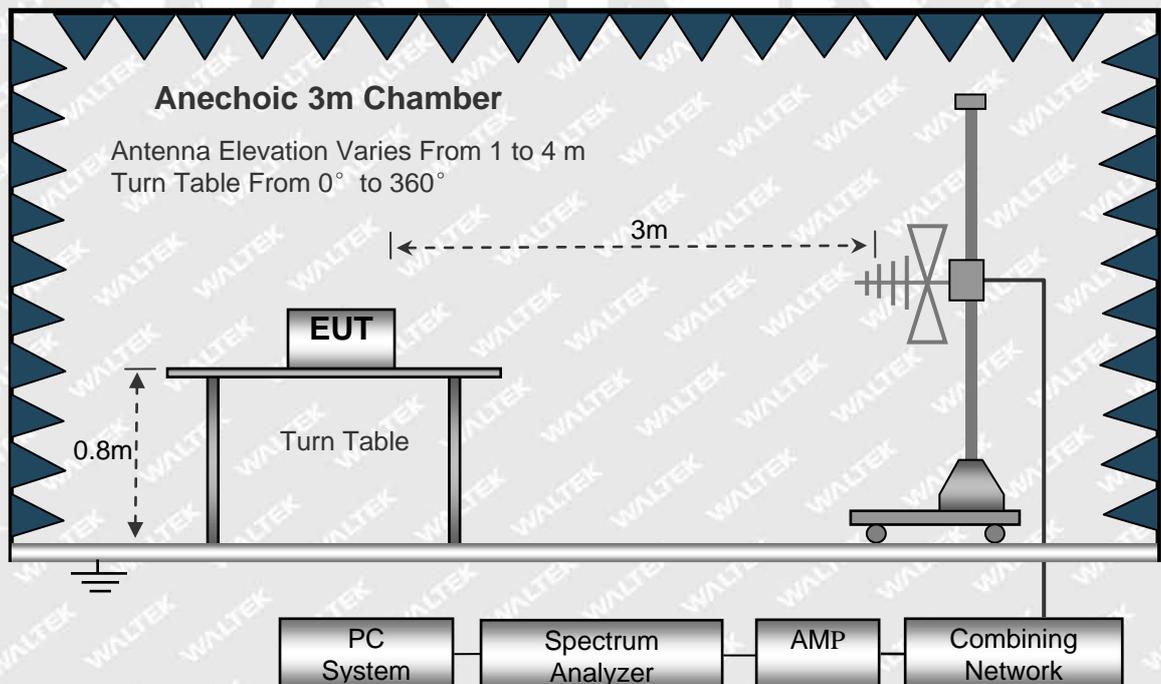



Frequency Range: Above 1 GHz

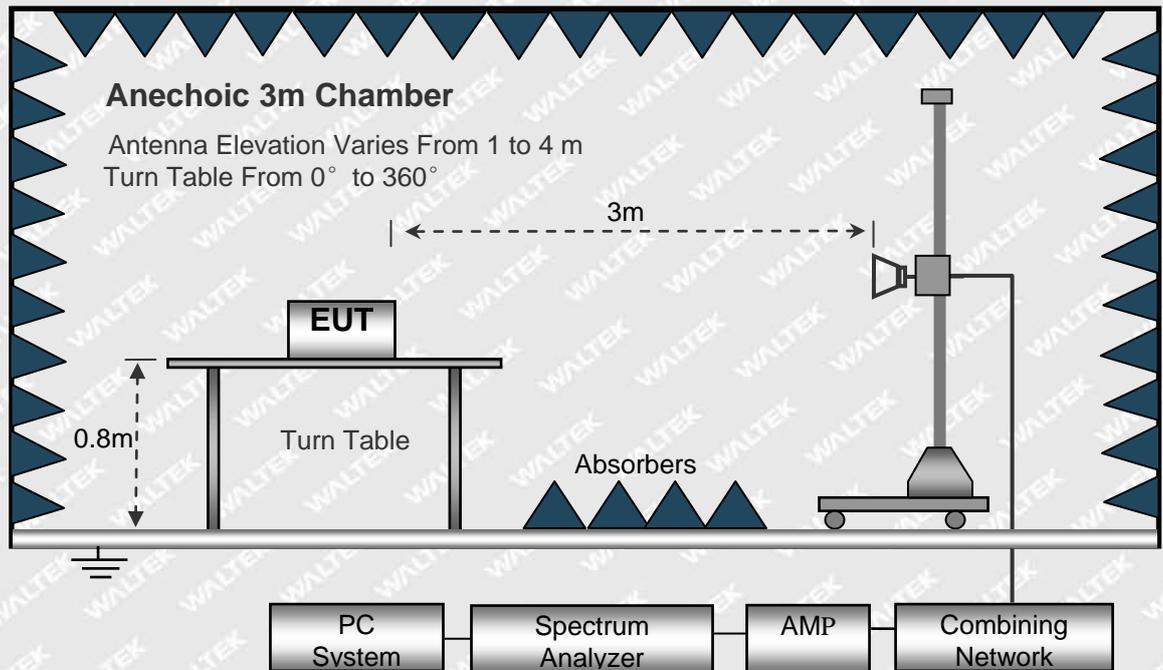

### 5.1.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit.

The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$



### 5.1.4 Test Result

Frequency Range: 30MHz ~ 1000MHz


Antenna Polarization: Vertical

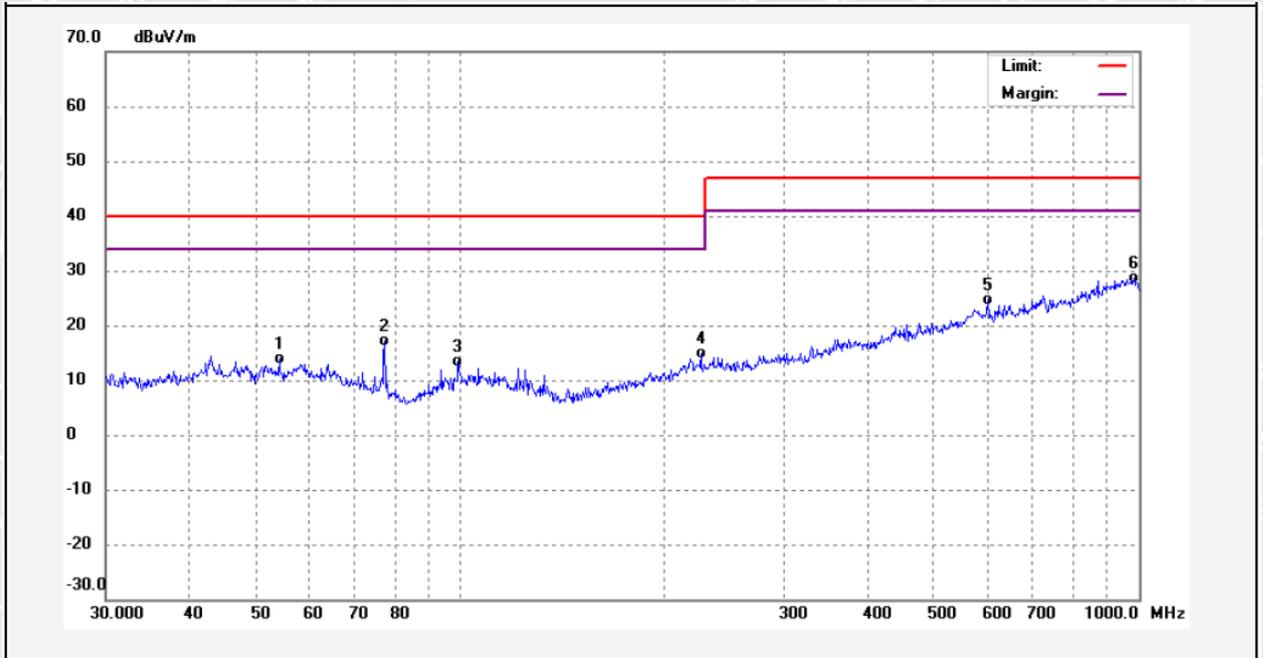

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	54.1090	-0.31	14.30	13.99	40.00	-26.01	QP	
2	77.4026	7.18	10.00	17.18	40.00	-22.82	QP	
3	99.5281	1.14	12.20	13.34	40.00	-26.66	QP	
4	226.4962	0.48	14.34	14.82	40.00	-25.18	QP	
5	601.2157	2.11	22.58	24.69	47.00	-22.31	QP	
6	983.9992	0.98	27.69	28.67	47.00	-18.33	QP	



Antenna Polarization: Horizontal

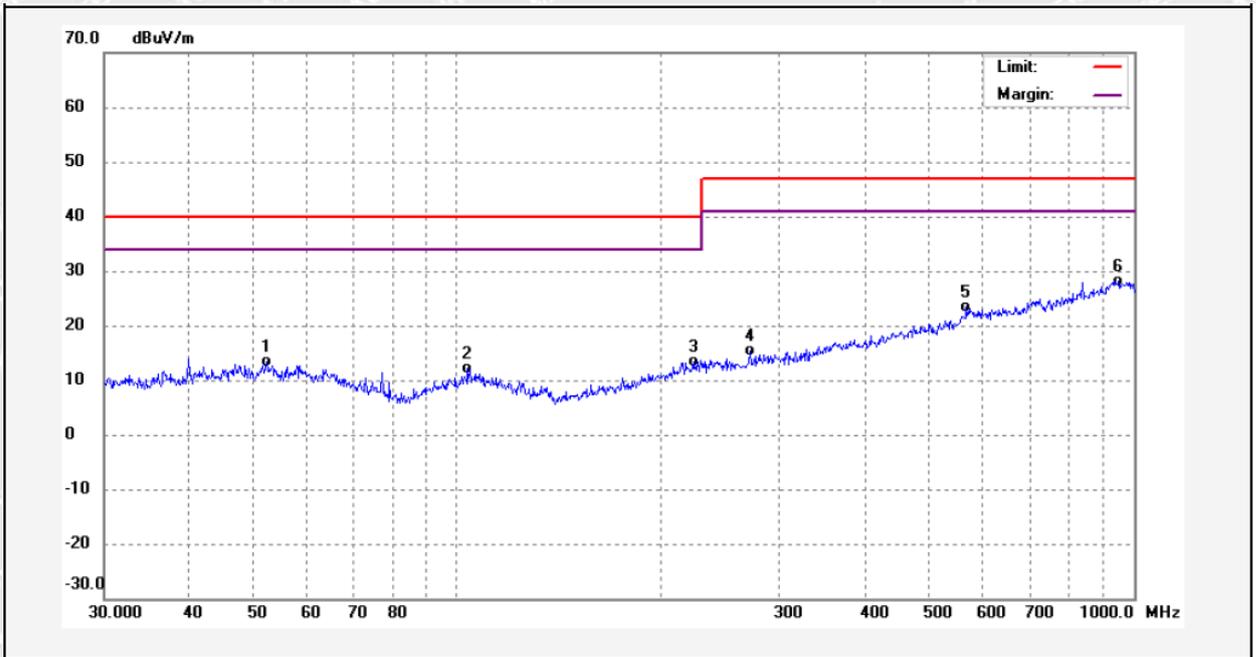


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	52.3362	-0.86	14.35	13.49	40.00	-26.51	QP	
2	103.7691	-0.71	12.89	12.18	40.00	-27.82	QP	
3	223.7334	-0.96	14.36	13.40	40.00	-26.60	QP	
4	270.6593	0.67	14.63	15.30	47.00	-31.70	QP	
5	566.6223	0.73	22.64	23.37	47.00	-23.63	QP	
6	949.7596	0.43	27.63	28.06	47.00	-18.94	QP	



**Frequency Range: 1000MHz ~ 6000MHz**


Antenna Polarization: Vertical

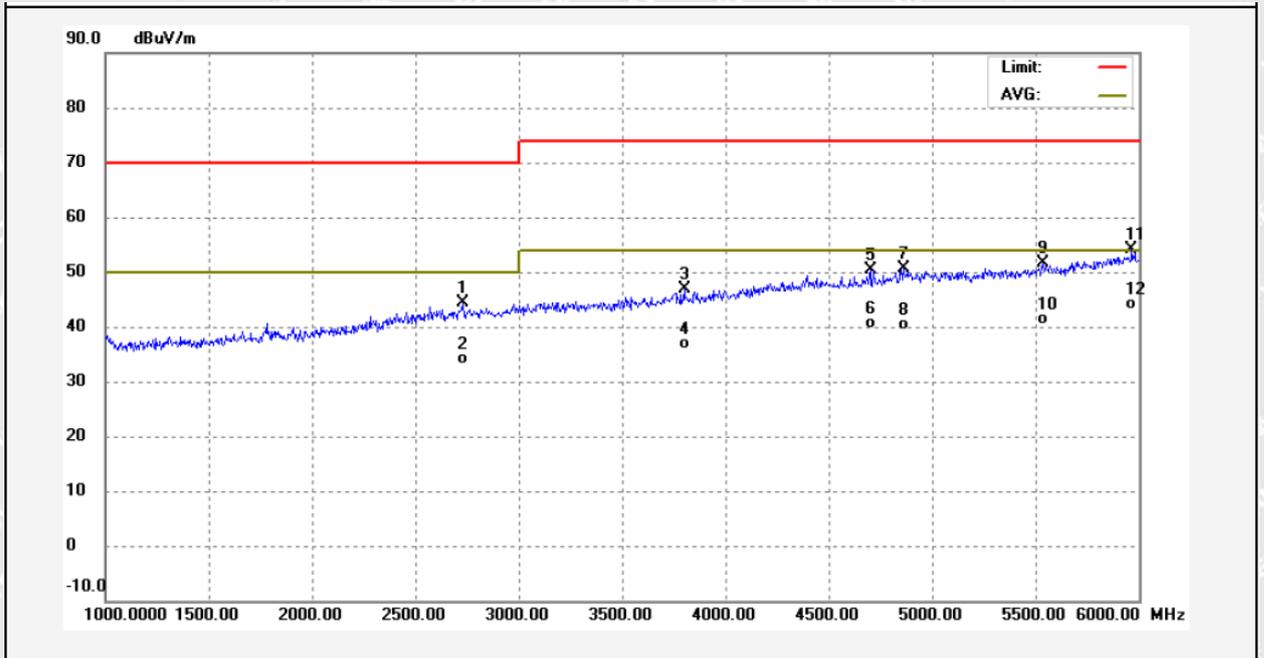

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2733.000	11.10	33.26	44.36	70.00	-25.64	peak	
2	2733.000	0.99	33.26	34.25	50.00	-15.75	AVG	
3	3801.000	11.55	35.45	47.00	74.00	-27.00	peak	
4	3801.000	1.52	35.45	36.97	54.00	-17.03	AVG	
5	4704.000	12.37	38.01	50.38	74.00	-23.62	peak	
6	4704.000	2.54	38.01	40.55	54.00	-13.45	AVG	
7	4861.000	12.20	38.42	50.62	74.00	-23.38	peak	
8	4861.000	1.93	38.42	40.35	54.00	-13.65	AVG	
9	5538.000	12.01	39.70	51.71	74.00	-22.29	peak	
10	5538.000	1.66	39.70	41.36	54.00	-12.64	AVG	
11	5968.000	13.41	40.84	54.25	74.00	-19.75	peak	
12	5968.000	3.28	40.84	44.12	54.00	-9.88	AVG	



Antenna Polarization: Horizontal

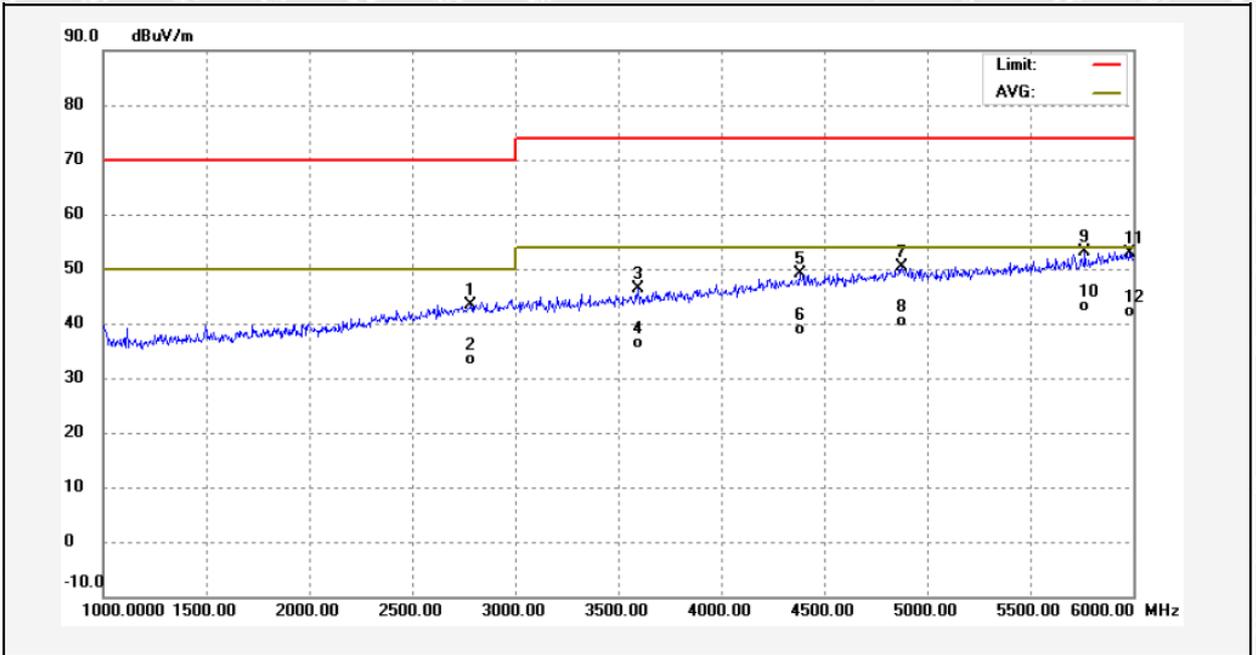

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2785.000	10.11	33.39	43.50	70.00	-26.50	peak	
2	2785.000	0.03	33.39	33.42	50.00	-16.58	AVG	
3	3595.500	11.38	34.96	46.34	74.00	-27.66	peak	
4	3595.500	1.45	34.96	36.41	54.00	-17.59	AVG	
5	4381.500	11.92	37.11	49.03	74.00	-24.97	peak	
6	4381.500	1.81	37.11	38.92	54.00	-15.08	AVG	
7	4875.500	11.80	38.47	50.27	74.00	-23.73	peak	
8	4875.500	1.79	38.47	40.26	54.00	-13.74	AVG	
9	5767.500	12.86	40.31	53.17	74.00	-20.83	peak	
10	5767.500	2.74	40.31	43.05	54.00	-10.95	AVG	
11	5982.500	11.95	40.88	52.83	74.00	-21.17	peak	
12	5982.500	1.30	40.88	42.18	54.00	-11.82	AVG	



## 6 EMC Requirement for Immunity

### 6.1 Performance Criteria

#### 6.1.1 General performance criteria

The performance criteria are:

- performance criteria A for immunity tests with phenomena of a continuous nature;
- performance criteria B for immunity tests with phenomena of a transient nature;
- performance criteria C for immunity tests with power interruptions exceeding a certain time.

#### 6.1.2 Performance table

Criteria	During test	After test
A	Shall operate as intended. (See note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.

# WALTEK



## 6.2 Electrostatic Discharge(ESD)

<b>Test Requirement</b> .....	: ETSI EN 301 489-17
<b>Test Method</b> .....	: ETSI EN 301 489-1, EN 61000-4-2
<b>Discharge Impedance</b> .....	: 330 $\Omega$ / 150 pF
<b>Discharge Voltage</b> .....	: Air Discharge: +/-2,4,8 KV Contact Discharge: +/-2,4 kV HCP & VCP: +/-2,4 kV
<b>Polarity</b> .....	: Positive & Negative
<b>Discharge Repeat Times</b> .....	: At Least 20 times at each test point
<b>Discharge Mode</b> .....	: Single Discharge
<b>Discharge Period</b> .....	: 1 second minimum

### 6.2.1 E.U.T. Operation

#### Operating Environment:


<b>Temperature</b> .....	: 22.1°C
<b>Humidity</b> .....	: 52.4%RH
<b>Atmospheric Pressure</b> .....	: 100.2kPa

#### EUT Operation:

<b>Input Voltage</b> .....	: Battery 3.7V
<b>Operating Mode</b> .....	: BT connected mode

### 6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the EN 61000-4-2.

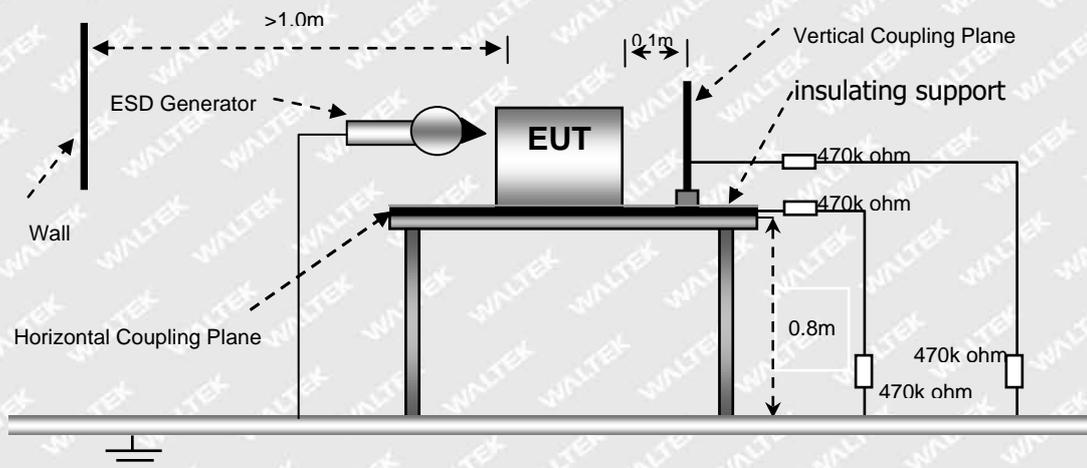



### 6.2.3 Test Result

Direct Discharge			Performance Criteria	
Discharge Level (kV)	Performance Criterion	Test Point	Contact Discharge	Air Discharge
$\pm 2 / \pm 4 / \pm 8$	B	1	N/A	Pass*
$\pm 2 / \pm 4$	B	2	Pass*	N/A

Remark:

Test points 1. All Exposed Surface & Seams; 2. All metallic part

\* During the test no deviation was detected to the selected operation mode(s)

Indirect Discharge			Performance Criteria	
Discharge Level (kV)	Performance Criterion	Test Point	Horizontal Coupling	Vertical Coupling
$\pm 2 / \pm 4$	B	1	Pass*	Pass*

Remark:

Test points 1. All sides

\* During the test no deviation was detected to the selected operation mode(s)

# WALTEK



### 6.3 RF Electromagnetic Field (80MHz to 6 000MHz) (RS)

Test Requirement .....	: ETSI EN 301 489-17
Test Method .....	: ETSI EN 301 489-1, EN 61000-4-3
Face of EUT .....	: Front, Back, Left, Right
Frequency Range .....	: 80MHz to 6 000MHz
Test Level .....	: 3V/m
Modulation .....	: 80%, 1kHz Amplitude Modulation.
Antenna polarisation.....	: Horizontal& Vertical

#### 6.3.1 E.U.T. Operation

##### Operating Environment:


Temperature.....	: 22.3°C
Humidity .....	: 52.5%RH
Atmospheric Pressure.....	: 100.4kPa

##### EUT Operation:

Input Voltage.....	: Battery 3.7V
Operating Mode .....	: BT connected mode

#### 6.3.2 Block Diagram of Setup

The Radiated Immunity test was performed in accordance with the EN 61000-4-3.

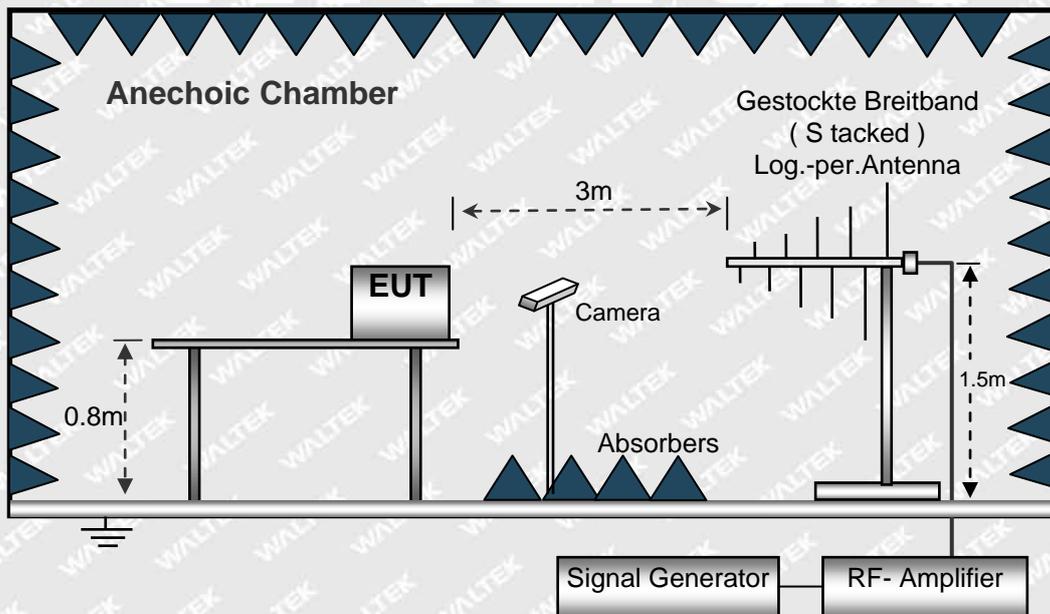



### 6.3.3 Test Result

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80MHz to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80MHz to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
1000MHz to 6000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
1000MHz to 6000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:

- \* During the test no deviation was detected to the selected operation mode(s)

# WALTEK



## 7 Photographs - Test Setup

### 7.1 Photograph - Radiated Emissions Test Setup

Below 1000MHz



Above 1000MHz





## 7.2 Photograph - RF Electromagnetic Field Test Setup



## 7.3 Photograph - ESD Test Setup





## 8 Photographs – EUT Constructional Details

Please refer to “ANNEX” (Reference No. WTF26F01002725W).

=====End of Report=====

# WALTEK



中国认可  
国际互认  
检测  
TESTING  
CNAS L6478



# TEST REPORT

**Reference No.**..... : WTF26F01002726W  
**Applicant**..... : Mid Ocean Brands B.V.  
**Address**..... : Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan,  
Kowloon, Hong Kong.  
**Manufacturer** ..... : 120041  
**Address**..... : ---  
**Product Name**..... : TWS earbuds with charging case  
**Model No.**..... : MO6862  
**Test specification**..... : EN 55032:2015+A11:2020+A1:2020  
EN 55035:2017+A11:2020  
**Date of Receipt sample** .... : 2026-01-15  
**Date of Test** ..... : 2026-01-15 to 2026-01-18  
**Date of Issue**..... : 2026-01-28  
**Test Report Form No.** ..... : WEI-55032A-04B  
**Test Result**..... : **Pass**

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Foshan) Co., Ltd.**

Address: 1/F., Building 19, Sunlink Machinery City, Xingye 4 Road,  
Guanglong Industrial Park, Chihua Neighborhood Committee, Chencun,  
Shunde District, Foshan, Guangdong, China

Tel:+86-757-23811398 Fax:+86-757-23811381 E-mail:info@waltek.com.cn

Tested by:

Roy Hong

Approved by:

Danny Zhou



## 1 Test Summary

EMISSION				
Test Item	Test Standard	Class / Severity	Result	
Mains Terminal Disturbance Voltage, 150kHz to 30MHz	EN 55032:2015+A11:2020+A1:2020	Table A.10	Pass	
Radiated Emission, 30MHz to 1000MHz	EN 55032:2015+A11:2020+A1:2020	Table A.4	Pass	
Radiation Emission, 1GHz to 6GHz	EN 55032:2015+A11:2020+A1:2020	Table A.5	Pass	
IMMUNITY (EN 55035:2017+A11:2020)				
Test Item	Test Method	Class / Severity	Performance Criteria	Result
Electrostatic Discharge(ESD)	IEC 61000-4-2:2008	±4 Kv Contact ±8 Kv Air	B	Pass
Continuous RF Electromagnetic Field Disturbances	IEC 61000-4-3:2006+A1+A2	3V/m, 80%, 1kHz, Amp. Mod.	A	Pass
Electrical Fast Transients (EFT)	IEC 61000-4-4:2012	AC ±1.0Kv DC ±0.5Kv	B	Pass
Surge	IEC 61000-4-5:2005	±1Kv D.M.† ±2Kv C.M.‡	B	Pass
Continuous Induced RF Disturbances, 0.15MHz to 10MHz	IEC 61000-4-6:2008	3Vr.m.s.(emf), 80%, 1kHz Amp. Mod.	A	Pass
Continuous Induced RF Disturbances, 10MHz to 30MHz		3 to 1Vr.m.s.(emf), 80%, 1kHz Amp. Mod	A	
Continuous Induced RF Disturbances, 30MHz to 80MHz		1Vr.m.s.(emf), 80%, 1kHz Amp. Mod	A	
Power-Frequency Magnetic Field	IEC 61000-4-8:2009	1A/m	A	N/A
Voltage Dips	IEC 61000-4-11:2004	< 5 % U <sub>T</sub> * for 0.5per	B	Pass
Voltage Interruptions		70 % U <sub>T</sub> * for 25/30per	C	
		< 5 % U <sub>T</sub> * for 250/300per	C	

Remark:

- Pass Test item meets the requirement  
 Fail Test item does not meet the requirement  
 N/A Test case does not apply to the test object  
 A.M Amplitude Modulation  
 † Differential Mode  
 ‡ Common Mode  
 \* U<sub>T</sub> is the nominal supply voltage



## 2 Contents

	Page
<b>COVER PAGE</b> .....	<b>1</b>
<b>1 TEST SUMMARY</b> .....	<b>2</b>
<b>2 CONTENTS</b> .....	<b>3</b>
<b>3 GENERAL INFORMATION</b> .....	<b>5</b>
3.1 GENERAL DESCRIPTION OF E.U.T. ....	5
3.2 DETAILS OF E.U.T. ....	5
3.3 DESCRIPTION OF SUPPORT UNITS .....	5
3.4 STANDARDS APPLICABLE FOR TESTING .....	5
3.5 TEST FACILITY.....	5
3.6 SUBCONTRACTED.....	6
3.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	6
<b>4 EQUIPMENT USED DURING TEST</b> .....	<b>7</b>
4.1 SOFTWARE LIST .....	9
4.2 MEASUREMENT UNCERTAINTY .....	9
4.3 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	10
4.4 DECISION RULE .....	10
<b>5 EMISSION TEST RESULTS</b> .....	<b>11</b>
5.1 MAINS TERMINALS DISTURBANCE VOLTAGE, 150 KHZ TO 30MHZ.....	11
5.1.1 <i>E.U.T. Operation</i> .....	11
5.1.2 <i>Block Diagram of Test Setup</i> .....	11
5.1.3 <i>Measurement Data</i> .....	11
5.1.4 <i>Corrected Amplitude &amp; Margin Calculation</i> .....	12
5.1.5 <i>Mains Terminals Disturbance Voltage Test Data</i> .....	12
5.2 RADIATED EMISSION, 30MHZ TO 1GHZ .....	14
5.2.1 <i>E.U.T. Operation</i> .....	14
5.2.2 <i>Block Diagram of Test Setup</i> .....	14
5.2.3 <i>Measurement Data</i> .....	14
5.2.4 <i>Corrected Amplitude &amp; Margin Calculation</i> .....	15
5.2.5 <i>Radiated Emission Test Data</i> .....	15
5.3 RADIATED EMISSION, 1GHZ TO 6GHZ.....	19
5.3.1 <i>E.U.T. Operation</i> .....	19
5.3.2 <i>Block Diagram of Test Setup</i> .....	19
5.3.3 <i>Measurement Data</i> .....	19
5.3.4 <i>Corrected Amplitude &amp; Margin Calculation</i> .....	20
5.3.5 <i>Radiated Emission Test Data</i> .....	20
<b>6 IMMUNITY TEST RESULTS</b> .....	<b>24</b>
6.1 PERFORMANCE CRITERIA .....	24
6.2 ELECTROSTATIC DISCHARGE (ESD).....	25
6.2.1 <i>E.U.T. Operation</i> .....	25
6.2.2 <i>Block Diagram of Setup</i> .....	25
6.2.3 <i>Direct Discharge Test Results</i> .....	26
6.2.4 <i>Indirect Discharge Test Results</i> .....	26
6.3 CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES.....	27
6.3.1 <i>E.U.T. Operation</i> .....	27
6.3.2 <i>Block Diagram of Setup</i> .....	27
6.3.3 <i>Test Results</i> .....	28
6.4 ELECTRICAL FAST TRANSIENTS (EFT).....	29
6.4.1 <i>E.U.T. Operation</i> .....	29
6.4.2 <i>Block Diagram of Setup</i> .....	30



6.4.3	Test Results.....	30
6.5	SURGE.....	31
6.5.1	E.U.T. Operation.....	31
6.5.2	Block Diagram of Setup.....	31
6.5.3	Test Result.....	32
6.6	CONTINUOUS INDUCED RF DISTURBANCE.....	33
6.6.1	E.U.T. Operation.....	33
6.6.2	Block Diagram of Setup.....	33
6.6.3	Test Results.....	34
6.7	VOLTAGE DIPS AND INTERRUPTIONS.....	35
6.7.1	E.U.T. Operation.....	35
6.7.2	Block Diagram of Setup.....	35
6.7.3	Test Results.....	36
<b>7</b>	<b>PHOTOGRAPHS – TEST SETUP .....</b>	<b>37</b>
7.1	PHOTOGRAPH – MAINS TERMINAL DISTURBANCE VOLTAGE TEST SETUP .....	37
7.2	PHOTOGRAPH – RADIATED EMISSION TEST SETUP, 30MHZ TO 1GHZ.....	37
7.3	PHOTOGRAPH – RADIATED EMISSION TEST SETUP, 1GHZ TO 6GHZ .....	38
7.4	PHOTOGRAPH – ESD IMMUNITY TEST SETUP .....	38
7.5	PHOTOGRAPH – CONTINUOUS RF ELECTROMAGNETIC FIELD DISTURBANCES TEST SETUP .....	39
7.6	PHOTOGRAPH – EFT IMMUNITY TEST SETUP.....	39
7.7	PHOTOGRAPH – SURGE IMMUNITY TEST SETUP.....	40
7.8	PHOTOGRAPH – CONTINUOUS INDUCED RF DISTURBANCE TEST SETUP .....	40
7.9	PHOTOGRAPH – VOLTAGE DIPS AND INTERRUPTIONS IMMUNITY TEST SETUP .....	41
<b>8</b>	<b>PHOTOGRAPHS – CONSTRUCTIONAL DETAILS .....</b>	<b>42</b>
8.1	EUT – EXTERNAL PHOTOS.....	42

# WALTEK



### 3 General Information

#### 3.1 General Description of E.U.T.

**Product Name** ..... : TWS earbuds with charging case

**Model No.** ..... : MO6862

**Remark** ..... : ---

#### 3.2 Details of E.U.T.

**Technical Data** ..... : Earbud battery: 3.7V, 25mAh  
Charger box input: DC 5V  
Charger box battery: 3.7V, 200mAh

#### 3.3 Description of Support Units

The EUT has been tested as an independent unit. MO6862 is the test sample. The full tests were performed in the condition of AC 230V/50Hz input with the AC adapter specified by the laboratory. The RE, ESD and RS tests were performed in the additional condition of battery 3.7V input.

#### 3.4 Standards Applicable for Testing

The tests were performed according to following standards:

EN 55032:2015+A11:2020 +A1:2020	Electromagnetic compatibility of multimedia equipment - Emission Requirements
EN 55035:2017+A11:2020	Electromagnetic compatibility of multimedia equipment - Immunity requirements

#### 3.5 Test Facility

The test facility has a test site registered with the following organizations:

- **ISED – Registration No.: 21895**

Waltek Testing Group (Foshan) Co., Ltd. has been registered and fully described in a report filed with the Innovation, Science and Economic Development Canada (ISED). The acceptance letter from the ISED is maintained in our files. Registration ISED number: 21895.

- **FCC – Registration No.: 820106**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 820106.

- **NVLAP – Lab Code: 600191-0**

Waltek Testing Group (Foshan) Co., Ltd. EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 600191-0.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



### 3.6 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

Yes  No

If Yes, list the related test items and lab information:

Test items: ---

Lab information: ---

### 3.7 Abnormalities from Standard Conditions

None.

# WALTEK



#### 4 Equipment Used during Test

<input type="checkbox"/> Mains Terminal Disturbance Voltage (Conducted Emission) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESR3	102423	Valid
2.	LISN	R&S	ENV216	101343	Valid
3.	Cable	HUBER+SUHNER	CBL2-NN-6M	223NN624	Valid
4.	Switch	CD	RSU-A4	RSUA4008	Valid
<input checked="" type="checkbox"/> Mains Terminal Disturbance Voltage (Conducted Emission) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESCI	101178	Valid
2.	LISN	R&S	ENV216	101215	Valid
3.	Cable 22	Times Microwave Systems	LMR195UF-BMNM-5.00M	---	Valid
4.	Switch	ESE	RSU/M2	---	Valid
<input type="checkbox"/> Mains Terminal Disturbance Voltage (Conducted Emission) 3#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMI Test Receiver	R&S	ESR3	102842	Valid
2.	LISN	R&S	ENV216	101542	Valid
3.	Cable 12	YIHENG	LMR195UF-NMNM-2.5	---	Valid
4.	Manual RF Switch	Top Precision	SW-2	RSU0402	Valid
<input checked="" type="checkbox"/> Radiated Emission (30MHz to 1GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	---	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9162	9162-117	Valid
4.	Cable 20	Times Microwave Systems	RG223-NMNM-10M	---	Valid
5.	Cable 21	Times Microwave Systems	RG223-NMNM-3M	---	Valid
<input type="checkbox"/> Radiated Emission (30MHz to 1GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	YIHENG	9m×6m×6m	YH2021071801	Valid
2.	EMI Test Receiver	R&S	ESR7	102454	Valid
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	01418	Valid
4.	Cable 14	YIHENG	LMR240UF-NMSM-7.5	---	Valid



<input checked="" type="checkbox"/> Radiated Emission (1GHz to 6GHz) 1#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	Valid
4.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	Valid
5.	Preamplifier	Lunar E M	LNA1G18-40	20160501002	Valid
<input type="checkbox"/> Radiated Emission (1GHz to 6GHz) 2#					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	3m Semi-anechoic Chamber	CHANGCHUANG	9m×6m×6m	-	Valid
2.	EMI Test Receiver	R&S	ESR7	101566	Valid
3.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	01561	Valid
4.	Coaxial Cable (above 1GHz)	Times-Microwave	CBL5-NN	-	Valid
5.	Preamplifier	Lunar E M	LNA1G18-40	20160501002	Valid
<input checked="" type="checkbox"/> ESD					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	ESD Simulator	TESEQ	NSG437	521	Valid
<input checked="" type="checkbox"/> EFT & Voltage Dips and Interruptions					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	EMS test system	TESEQ	NSG3040	1858	Valid
2.	Step transformer	TESEQ	INA6501	206	Valid
3.	Coupling clamp	TESEQ	CDN8014	31405	Valid
<input checked="" type="checkbox"/> Surge					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Surge Simulator	TESEQ	NSG3060	1395	Valid
<input checked="" type="checkbox"/> Injected Currents					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	Conducted Immunity test system	TESEQ	NSG4070	45345	Valid
2.	CDN	TESEQ	CDN M016	31586	Valid
3.	EM Clamp	TESEQ	KEMZ801	32362	Valid
4.	6dB Attenuator	TESEQ	ATN6075	32122	Valid



<input checked="" type="checkbox"/> Radio-frequency Electromagnetic Fields					
Item	Equipment	Manufacturer	Model No.	Serial No.	Calibration Status
1.	RF Power Amplifier	MICOTOP	MPA-80-1000-250	MPA2405139	Valid
2.	RF Power Amplifier	MICOTOP	MPA-1000-6000-100	MPA2405140	Valid
3.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP9128E-SPECIAL	142	Valid
4.	Stacked double logarithmic periodic antenna	SCHWARZBECK	STLP 9149	476	Valid
5.	Analog signal generator	RS	SMB100A	105566	Valid
6.	Power meter	RS	NRP6A	101133	Valid
7.	Power meter	RS	NRP6A	101134	Valid

: Not Used

: Used

#### 4.1 Software List

Description	Manufacturer	Model	Version
EMI Test Software (Conducted Emission 1#)	FARATRONIC	EZ-EMC	EMEC-3A1
EMI Test Software (Conducted Emission 2#)	FARATRONIC	EZ-CON	FARAD-3A1.1+
EMI Test Software (Conducted Emission 3#)	FARATRONIC	EZ-EMC	EMC-CON 3A1.1+
EMI Test Software (Radiated Emission 1#)	FARATRONIC	EZ-EMC	RA-03A1-2
EMI Test Software (Radiated Emission 2#)	FARATRONIC	EZ-EMC	RA-03A1-2
Radiated Immunity Test Software	Chinese EMC	EMS	V1.0.0.0

#### 4.2 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Conducted Emission	150kHz~30MHz	±2.6dB	(1)
Radiated Emission	30MHz~1GHz	±4.5dB	(1)
Radiated Emission	1GHz~6GHz	±4.5dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



### 4.3 Special Accessories and Auxiliary Equipment

Item	Equipment	Technical Data	Manufacturer	Model No.
1.	AC Adapter	Input: AC 100-240V~, 50/60Hz, 0.5A Output: DC 5V, 2A or DC 9V, 2A	HUAWEI	HW-090200CH0

### 4.4 Decision Rule

Compliance or non-compliance with a disturbance limit shall be determined in the following manner.

If  $U_{LAB}$  is less than or equal to  $U_{cispr}$ , then

- Compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{LAB}$  is greater than  $U_{cispr}$ , then

- Compliance is deemed to occur if no measured disturbance level, increased by  $(U_{LAB} - U_{cispr})$ , exceeds the disturbance limit;
- Non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{LAB} - U_{cispr})$ , exceeds the disturbance limit.

# WALTEK



## 5 Emission Test Results

### 5.1 Mains Terminals Disturbance Voltage, 150 kHz to 30MHz

Test Requirement .....	: EN 55032 Annex A.3
Test Method .....	: EN 55032 Annex A.3
Limit .....	: Table A.10 of EN 55032
Test Result .....	: Pass
Frequency Range .....	: 150kHz to 30MHz
Class .....	: Class B

#### 5.1.1 E.U.T. Operation

##### Operating Environment:


Temperature .....	: 20.8°C
Humidity .....	: 49.3%RH
Atmospheric Pressure .....	: 101.2kPa

##### EUT Operation:

Input Voltage .....	: AC 230V/50Hz
Operating Mode .....	: Charging mode

#### 5.1.2 Block Diagram of Test Setup

The Mains Terminals Disturbance Voltage tests were performed in accordance with the CISPR 16-1-2.

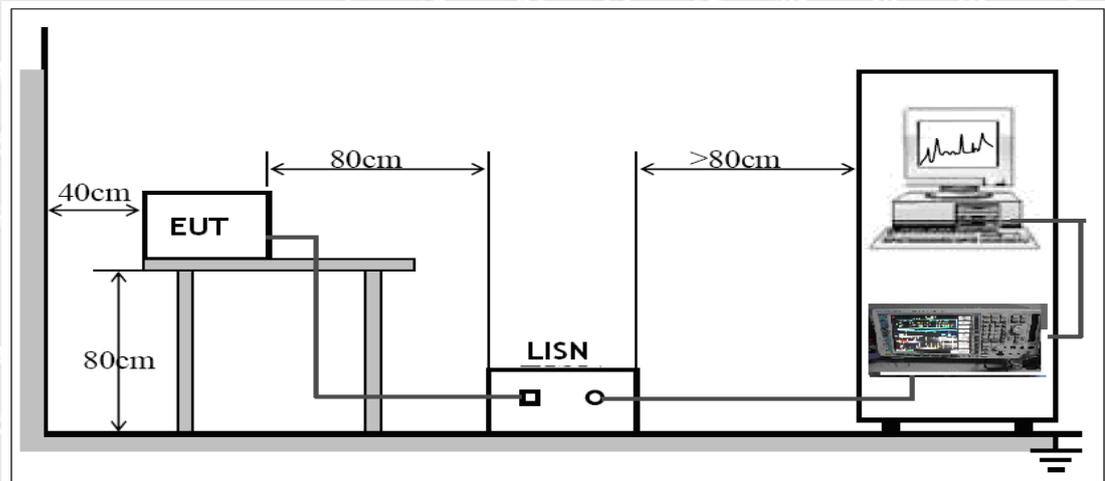

#### 5.1.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



### 5.1.4 Corrected Amplitude & Margin Calculation

The Corrected factor is calculated by adding LISN VDF(Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Measurement} = \text{Reading Level} + \text{Correct Factor}$$


$$\text{Correct Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Measurement} - \text{Limit}$$

### 5.1.5 Mains Terminals Disturbance Voltage Test Data


#### Live Line

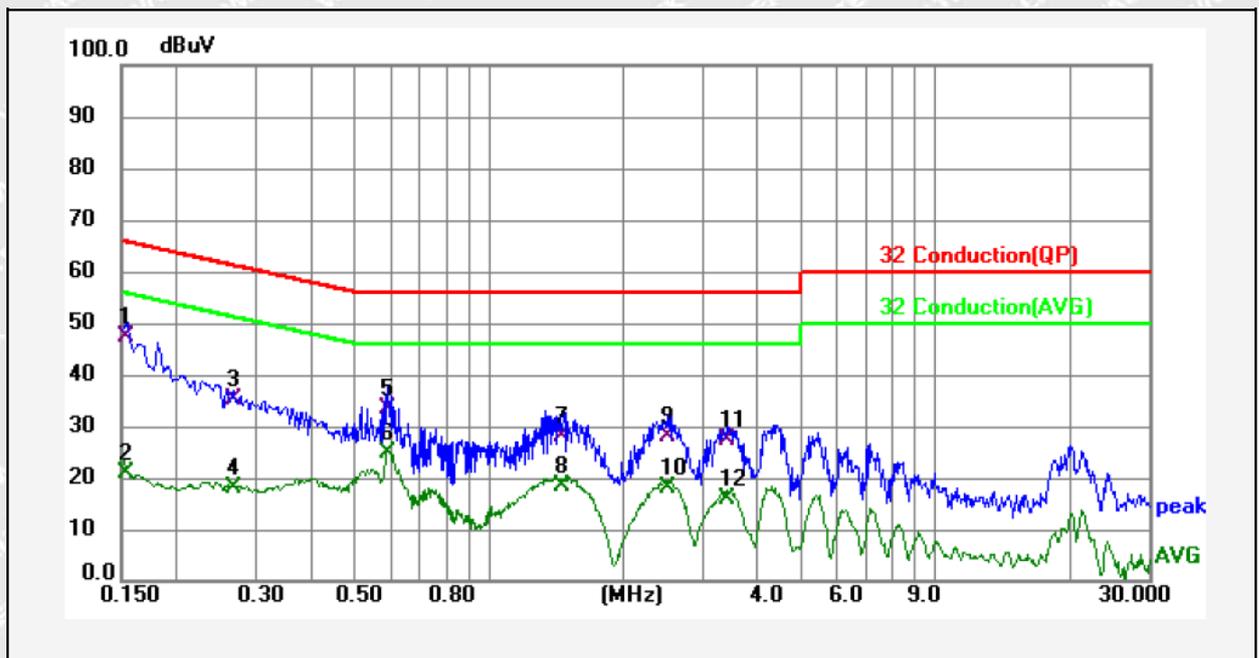

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.154	37.64	9.61	47.25	65.79	-18.54	QP	
2	0.154	11.41	9.61	21.02	55.79	-34.77	AVG	
3	0.267	25.41	9.61	35.02	61.21	-26.19	QP	
4	0.267	8.39	9.61	18.00	51.21	-33.21	AVG	
5	0.591	23.70	9.65	33.35	56.00	-22.65	QP	
6	0.591	15.35	9.65	25.00	46.00	-21.00	AVG	
7	1.450	18.34	9.71	28.05	56.00	-27.95	QP	
8	1.450	8.64	9.71	18.35	46.00	-27.65	AVG	
9	2.503	18.23	9.77	28.00	56.00	-28.00	QP	
10	2.503	8.37	9.77	18.14	46.00	-27.86	AVG	
11	3.421	17.54	9.81	27.35	56.00	-28.65	QP	
12	3.421	6.19	9.81	16.00	46.00	-30.00	AVG	



## Neutral Line

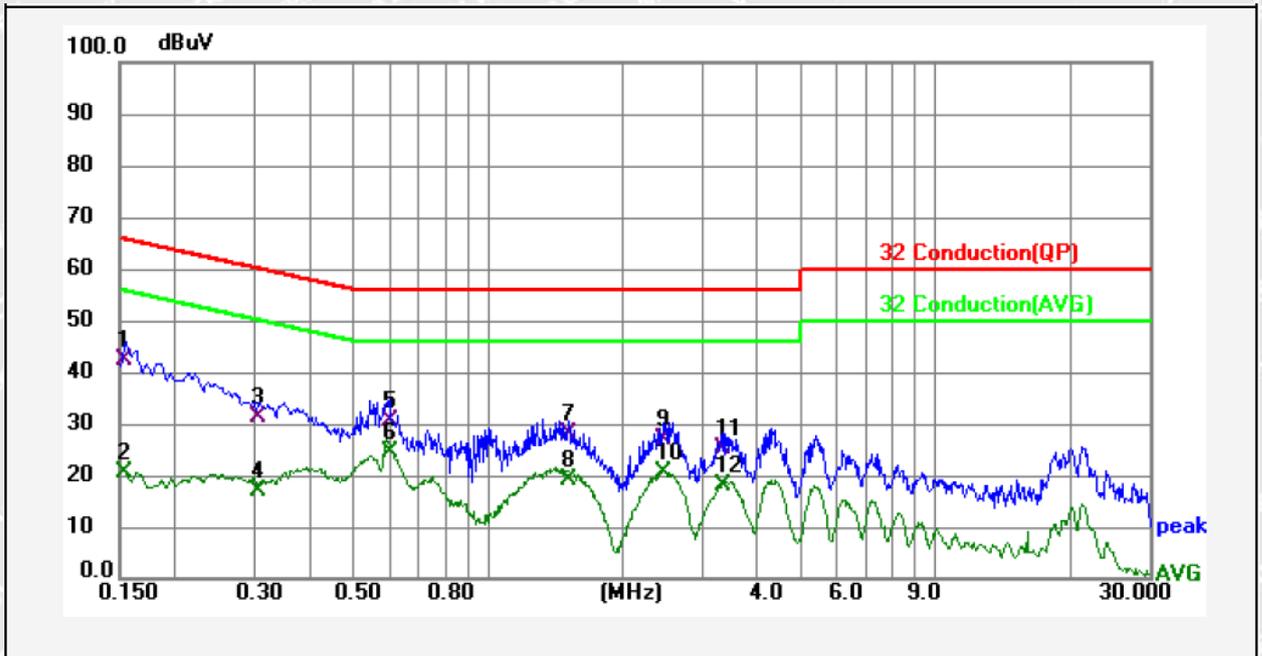

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Remark
1	0.154	32.83	9.52	42.35	65.79	-23.44	QP	
2	0.154	11.13	9.52	20.65	55.79	-35.14	AVG	
3	0.307	21.65	9.55	31.20	60.05	-28.85	QP	
4	0.307	7.45	9.55	17.00	50.05	-33.05	AVG	
5	0.600	20.83	9.58	30.41	56.00	-25.59	QP	
6	0.600	14.98	9.58	24.56	46.00	-21.44	AVG	
7	1.514	18.36	9.64	28.00	56.00	-28.00	QP	
8	1.514	9.36	9.64	19.00	46.00	-27.00	AVG	
9	2.467	17.44	9.68	27.12	56.00	-28.88	QP	
10	2.467	10.76	9.68	20.44	46.00	-25.56	AVG	
11	3.341	15.63	9.72	25.35	56.00	-30.65	QP	
12	3.341	8.22	9.72	17.94	46.00	-28.06	AVG	



## 5.2 Radiated Emission, 30MHz to 1GHz

Test Requirement .....	: EN 55032 Annex A.2
Test Method .....	: EN 55032 Annex A.2
Test Limit.....	: Table A.4 of EN 55032
Test Result .....	: Pass
Frequency Range .....	: 30MHz to 1000MHz
Class .....	: Class B

### 5.2.1 E.U.T. Operation

#### Operating Environment:


Temperature.....	: 22.4°C
Humidity .....	: 51.3%RH
Atmospheric Pressure .....	: 101.2kPa

#### EUT Operation:

Input Voltage.....	: AC 230V/50Hz for mode 1; Battery 3.7V for mode 2
Operating Mode .....	: Mode 1: Charging mode Mode 2: BT connected mode

### 5.2.2 Block Diagram of Test Setup

The Radiated Emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the CISPR 16-2-3.

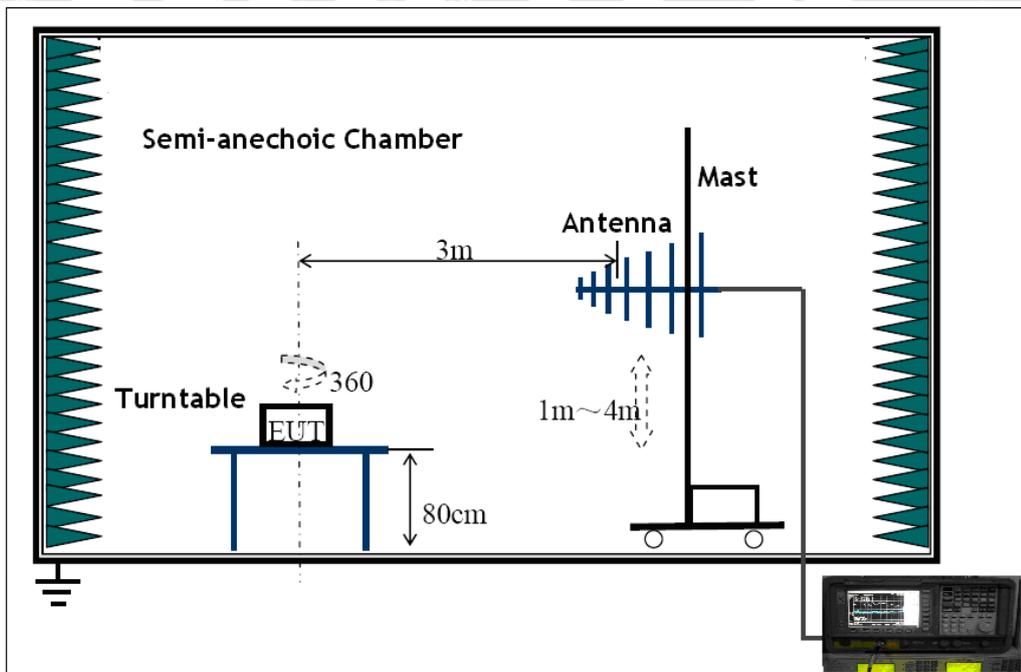

### 5.2.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for EUT 0°-360°. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



### 5.2.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

### 5.2.5 Radiated Emission Test Data

Test Mode: Charging mode

Input Voltage: AC 230V/50Hz

Vertical Polarization

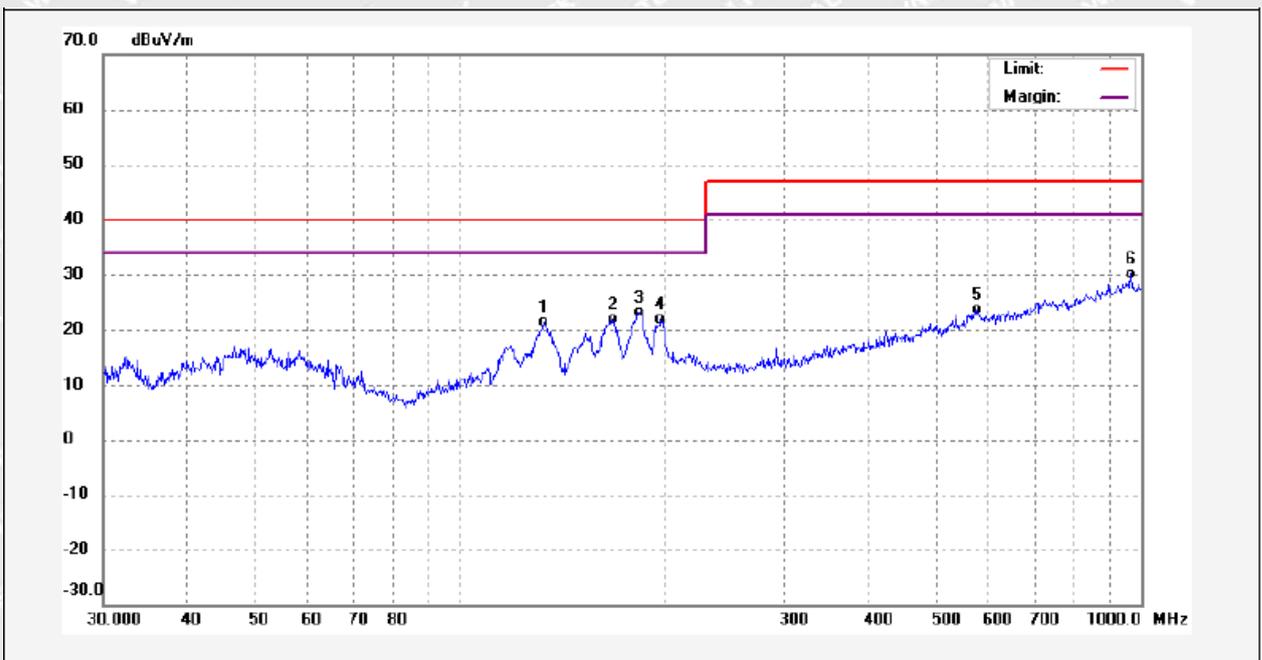


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	132.9178	11.43	9.96	21.39	40.00	-18.61	QP	
2	168.1188	11.24	10.59	21.83	40.00	-18.17	QP	
3	184.4252	11.79	11.46	23.25	40.00	-16.75	QP	
4	197.7541	9.25	12.56	21.81	40.00	-18.19	QP	
5	576.0381	0.79	22.81	23.60	47.00	-23.40	QP	
6	967.5757	2.35	27.75	30.10	47.00	-16.90	QP	



**Test Mode: Charging mode**  
**Horizontal Polarization**

**Input Voltage: AC 230V/50Hz**

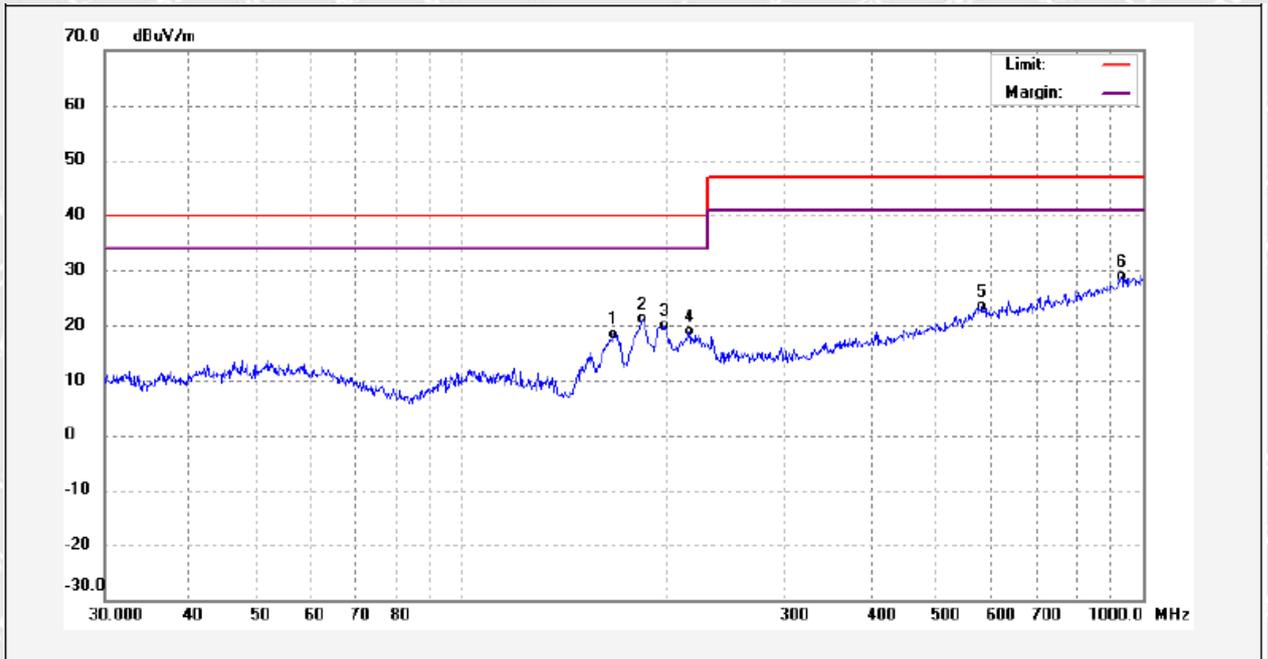


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	167.5890	7.89	10.58	18.47	40.00	-21.53	QP	
2	184.5545	9.69	11.47	21.16	40.00	-18.84	QP	
3	198.8667	7.34	12.62	19.96	40.00	-20.04	QP	
4	216.1755	4.66	14.19	18.85	40.00	-21.15	QP	
5	580.4990	0.53	22.81	23.34	47.00	-23.66	QP	
6	930.3122	1.38	27.49	28.87	47.00	-18.13	QP	



**Test Mode: BT connected mode**  
**Vertical Polarization**

**Input Voltage: Battery 3.7V**

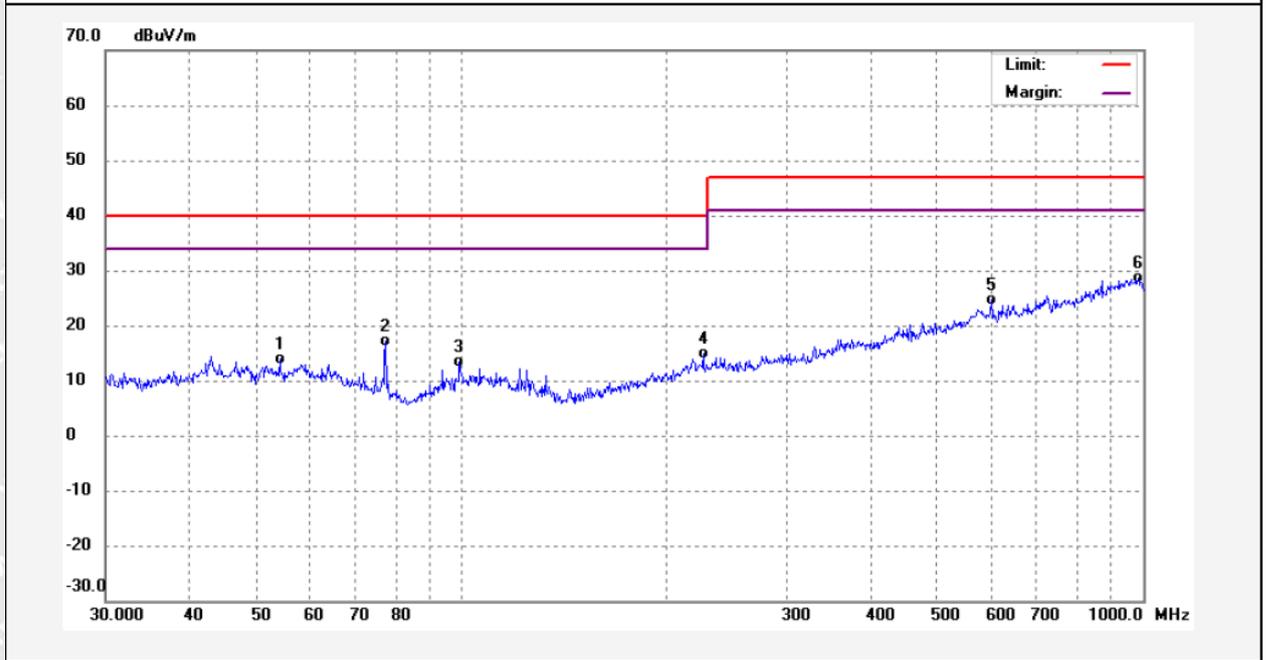


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	54.1090	-0.31	14.30	13.99	40.00	-26.01	QP	
2	77.4026	7.18	10.00	17.18	40.00	-22.82	QP	
3	99.5281	1.14	12.20	13.34	40.00	-26.66	QP	
4	226.4962	0.48	14.34	14.82	40.00	-25.18	QP	
5	601.2157	2.11	22.58	24.69	47.00	-22.31	QP	
6	983.9992	0.98	27.69	28.67	47.00	-18.33	QP	



**Test Mode: BT connected mode**  
**Horizontal Polarization**

**Input Voltage: Battery 3.7V**

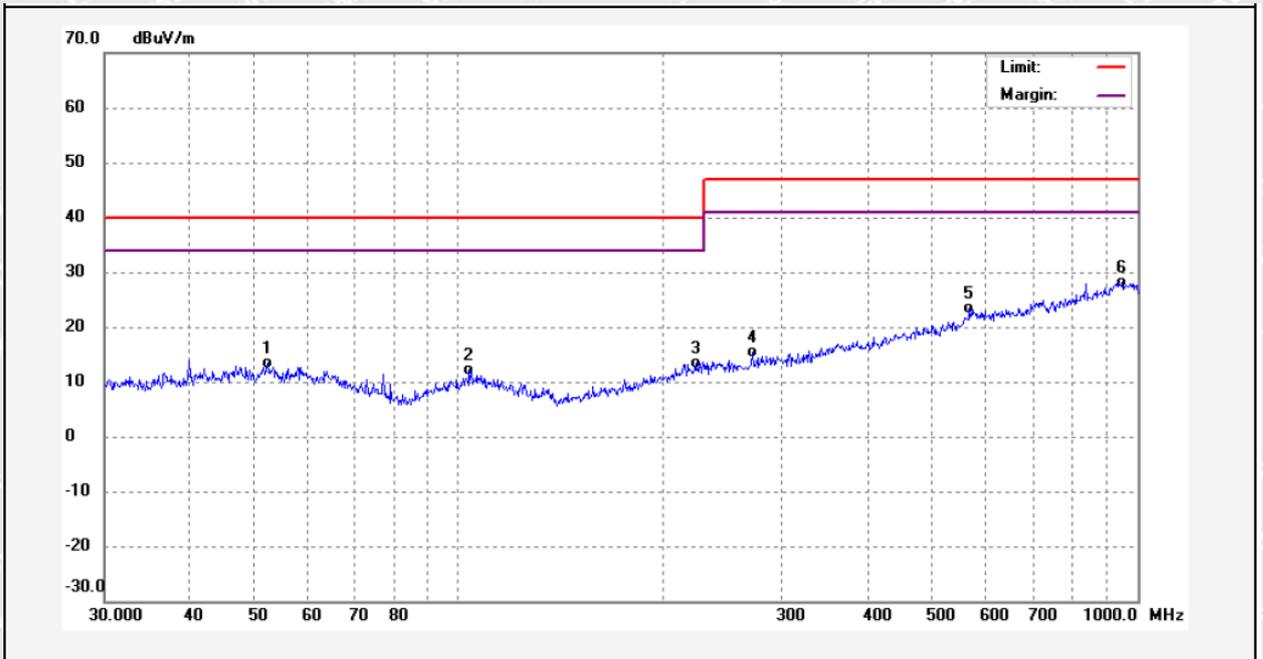

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	52.3362	-0.86	14.35	13.49	40.00	-26.51	QP	
2	103.7691	-0.71	12.89	12.18	40.00	-27.82	QP	
3	223.7334	-0.96	14.36	13.40	40.00	-26.60	QP	
4	270.6593	0.67	14.63	15.30	47.00	-31.70	QP	
5	566.6223	0.73	22.64	23.37	47.00	-23.63	QP	
6	949.7596	0.43	27.63	28.06	47.00	-18.94	QP	



### 5.3 Radiated Emission, 1GHz to 6GHz

<b>Test Requirement</b> .....	: EN 55032 Annex A.2
<b>Test Method</b> .....	: EN 55032 Annex A.2
<b>Test Limit</b> .....	: Table A.5 of EN 55032
<b>Test Result</b> .....	: Pass
<b>Frequency Range</b> .....	: 1GHz to 6GHz
<b>Class</b> .....	: Class B

#### 5.3.1 E.U.T. Operation

##### Operating Environment:


<b>Temperature</b> .....	: 22.4°C
<b>Humidity</b> .....	: 51.3%RH
<b>Atmospheric Pressure</b> .....	: 101.2kPa

##### EUT Operation:

<b>Input Voltage</b> .....	: AC 230V/50Hz for mode 1; Battery 3.7V for mode 2
<b>Operating Mode</b> .....	: Mode 1: Charging mode Mode 2: BT connected mode

#### 5.3.2 Block Diagram of Test Setup

The Radiated Emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the CISPR 16-2-3.

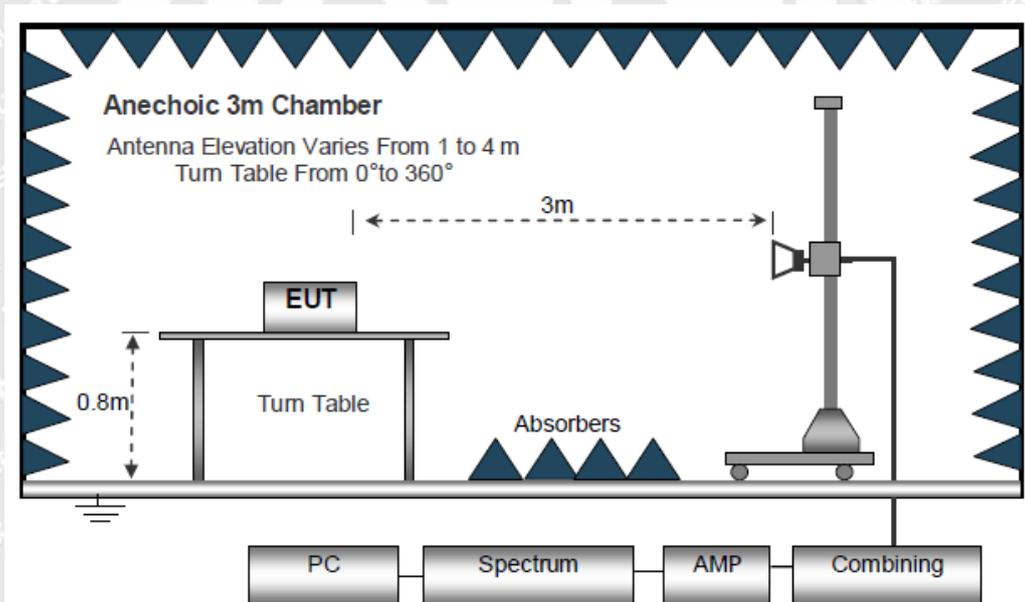

#### 5.3.3 Measurement Data

The maximised peak emissions from the EUT was scanned and measured for EUT 0°-360°. Quasi-peak measurements were performed if peak emissions were within 6dB of the limit line.



### 5.3.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Corr. Factor}$$

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

### 5.3.5 Radiated Emission Test Data

Test Mode: Charging mode

Input Voltage: AC 230V/50Hz

Vertical Polarization

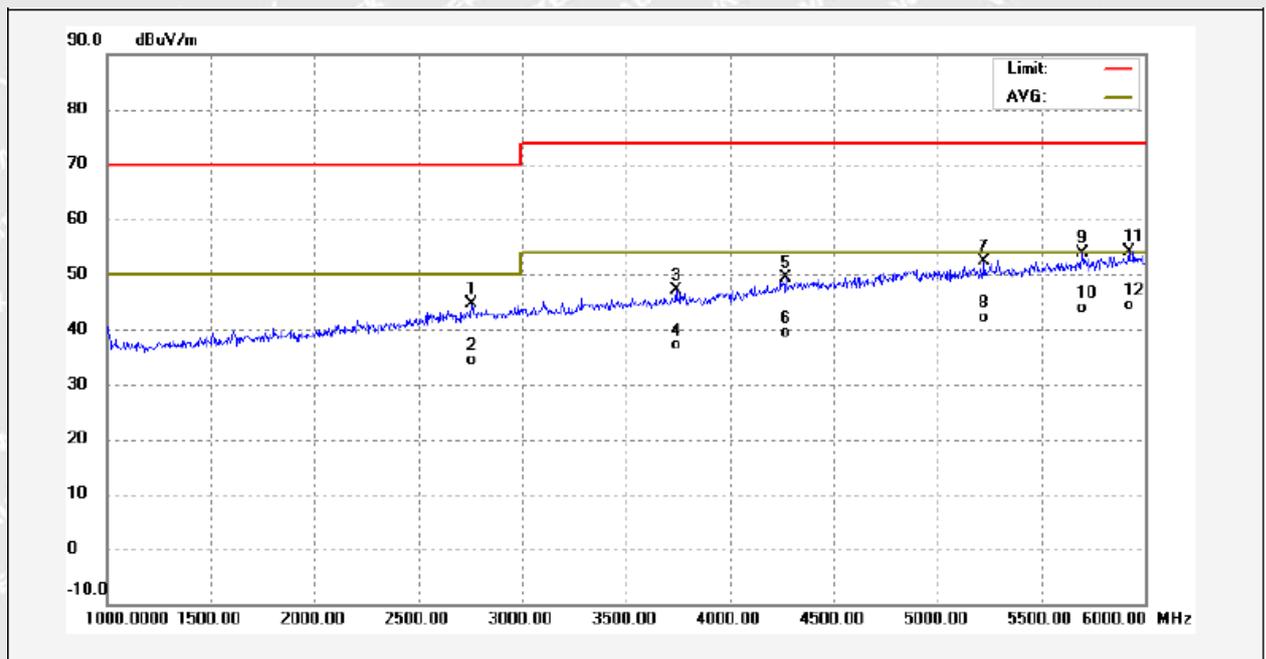


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2759.500	11.33	33.32	44.65	70.00	-25.35	peak	
2	2759.500	0.94	33.32	34.26	50.00	-15.74	AVG	
3	3740.500	11.72	35.31	47.03	74.00	-26.97	peak	
4	3740.500	1.78	35.31	37.09	54.00	-16.91	AVG	
5	4274.000	12.73	36.77	49.50	74.00	-24.50	peak	
6	4274.000	2.59	36.77	39.36	54.00	-14.64	AVG	
7	5225.000	13.25	39.15	52.40	74.00	-21.60	peak	
8	5225.000	3.02	39.15	42.17	54.00	-11.83	AVG	
9	5696.000	13.79	40.12	53.91	74.00	-20.09	peak	
10	5696.000	3.72	40.12	43.84	54.00	-10.16	AVG	
11	5921.500	13.53	40.72	54.25	74.00	-19.75	peak	
12	5921.500	3.54	40.72	44.26	54.00	-9.74	AVG	



**Test Mode: Charging mode**  
**Horizontal Polarization**

**Input Voltage: AC 230V/50Hz**

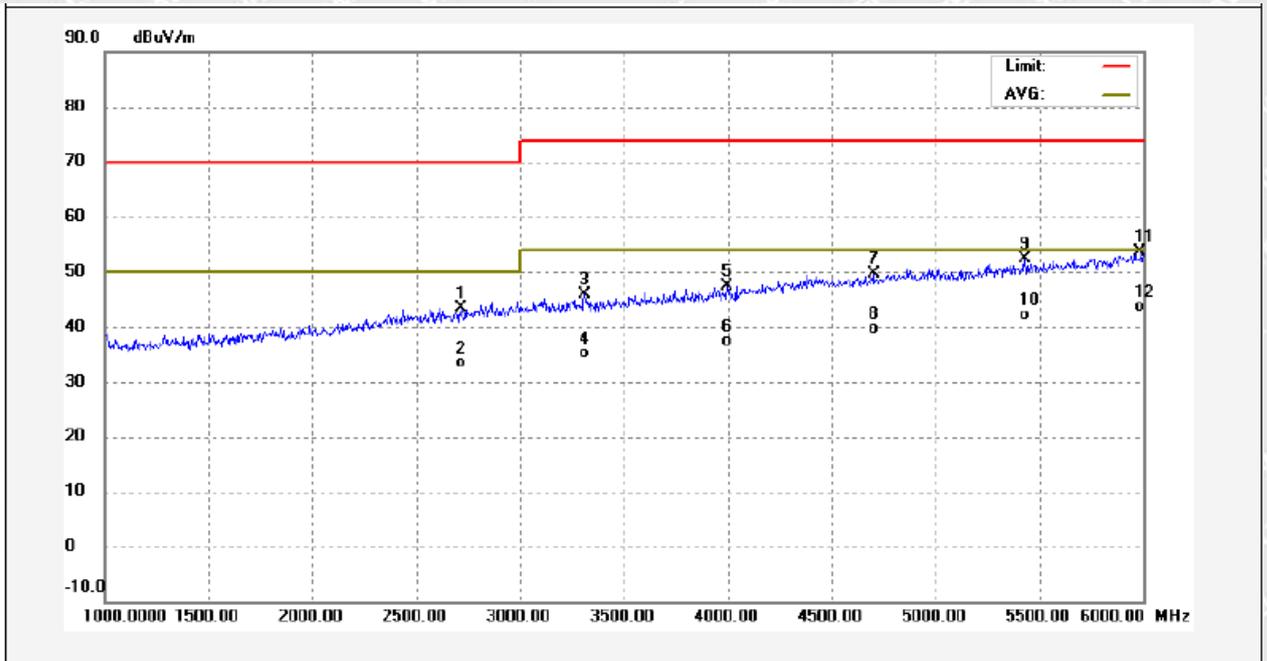


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2717.500	10.26	33.22	43.48	70.00	-26.52	peak	
2	2717.500	0.28	33.22	33.50	50.00	-16.50	AVG	
3	3311.000	11.50	34.42	45.92	74.00	-28.08	peak	
4	3311.000	0.82	34.42	35.24	54.00	-18.76	AVG	
5	3999.500	11.55	35.93	47.48	74.00	-26.52	peak	
6	3999.500	1.48	35.93	37.41	54.00	-16.59	AVG	
7	4702.000	11.73	38.00	49.73	74.00	-24.27	peak	
8	4702.000	1.63	38.00	39.63	54.00	-14.37	AVG	
9	5432.000	12.82	39.49	52.31	74.00	-21.69	peak	
10	5432.000	2.59	39.49	42.08	54.00	-11.92	AVG	
11	5986.500	12.83	40.90	53.73	74.00	-20.27	peak	
12	5986.500	2.79	40.90	43.69	54.00	-10.31	AVG	



**Test Mode: BT connected mode**  
**Vertical Polarization**

**Input Voltage: Battery 3.7V**

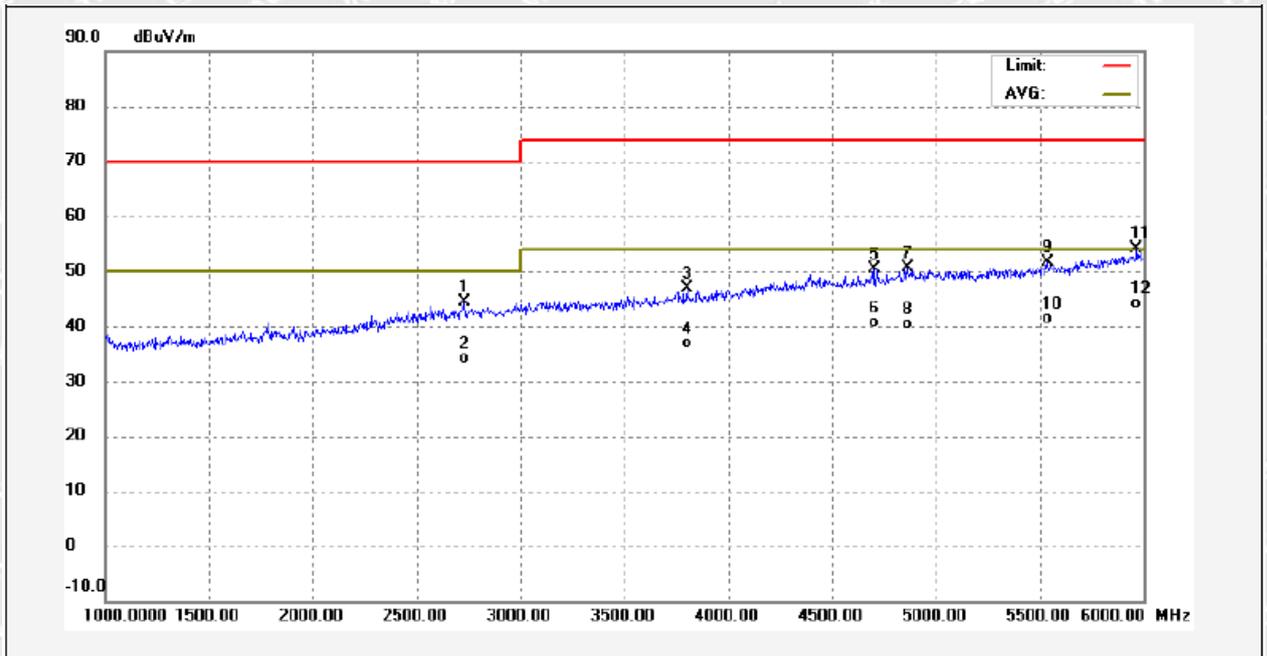


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2733.000	11.10	33.26	44.36	70.00	-25.64	peak	
2	2733.000	0.99	33.26	34.25	50.00	-15.75	AVG	
3	3801.000	11.55	35.45	47.00	74.00	-27.00	peak	
4	3801.000	1.52	35.45	36.97	54.00	-17.03	AVG	
5	4704.000	12.37	38.01	50.38	74.00	-23.62	peak	
6	4704.000	2.54	38.01	40.55	54.00	-13.45	AVG	
7	4861.000	12.20	38.42	50.62	74.00	-23.38	peak	
8	4861.000	1.93	38.42	40.35	54.00	-13.65	AVG	
9	5538.000	12.01	39.70	51.71	74.00	-22.29	peak	
10	5538.000	1.66	39.70	41.36	54.00	-12.64	AVG	
11	5968.000	13.41	40.84	54.25	74.00	-19.75	peak	
12	5968.000	3.28	40.84	44.12	54.00	-9.88	AVG	



**Test Mode: BT connected mode**  
**Horizontal Polarization**

**Input Voltage: Battery 3.7V**

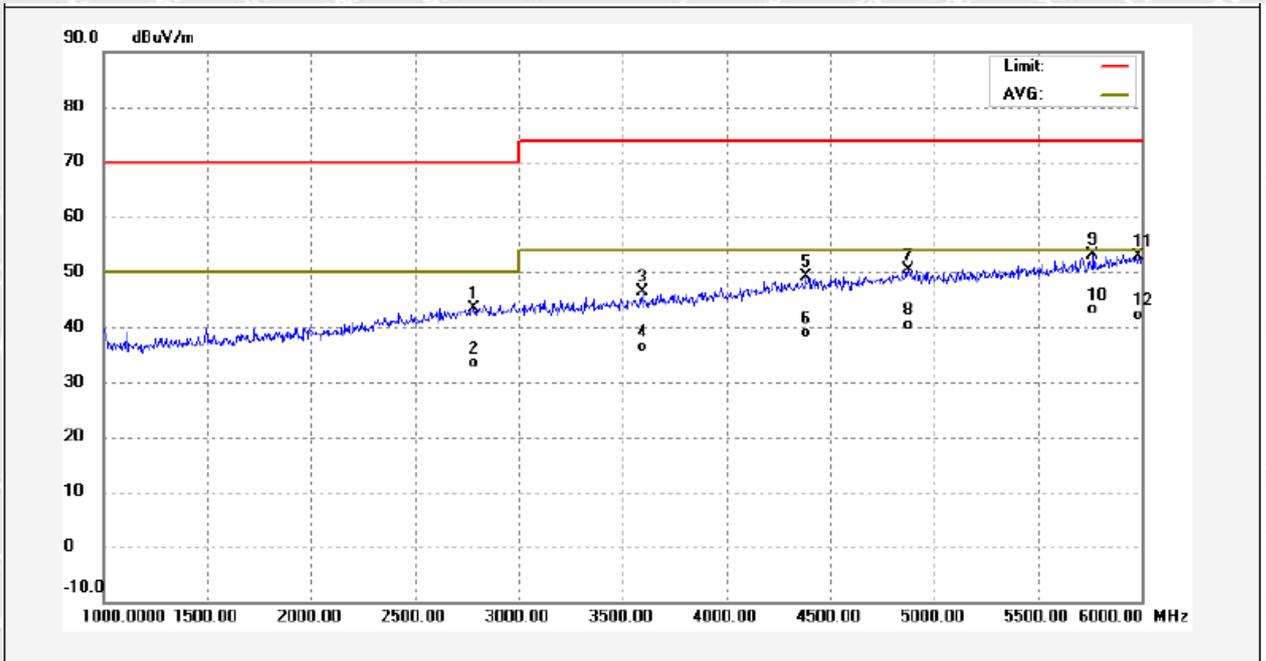

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2785.000	10.11	33.39	43.50	70.00	-26.50	peak	
2	2785.000	0.03	33.39	33.42	50.00	-16.58	AVG	
3	3595.500	11.38	34.96	46.34	74.00	-27.66	peak	
4	3595.500	1.45	34.96	36.41	54.00	-17.59	AVG	
5	4381.500	11.92	37.11	49.03	74.00	-24.97	peak	
6	4381.500	1.81	37.11	38.92	54.00	-15.08	AVG	
7	4875.500	11.80	38.47	50.27	74.00	-23.73	peak	
8	4875.500	1.79	38.47	40.26	54.00	-13.74	AVG	
9	5767.500	12.86	40.31	53.17	74.00	-20.83	peak	
10	5767.500	2.74	40.31	43.05	54.00	-10.95	AVG	
11	5982.500	11.95	40.88	52.83	74.00	-21.17	peak	
12	5982.500	1.30	40.88	42.18	54.00	-11.82	AVG	



## 6 Immunity Test Results

### 6.1 Performance Criteria

**Performance criterion A:** The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

**Performance criterion B:** After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test

**Performance criterion C:** Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

# WALTEK



## 6.2 Electrostatic Discharge (ESD)

Test Requirement .....	: EN 55035
Test Method .....	: IEC 61000-4-2
Test Result .....	: Pass
Discharge Impedance .....	: 330Ω / 150pF
Discharge Voltage .....	: Air Discharge: ±8kV Contact Discharge: ±4kV HCP & VCP: ±4kV
Polarity .....	: Positive & Negative
Number of Discharge .....	: Minimum 10 times at each test point
Discharge Mode .....	: Single Discharge
Discharge Period .....	: 1 second minimum

### 6.2.1 E.U.T. Operation

#### Operating Environment:


Temperature .....	: 22.8°C
Humidity .....	: 51.6%RH
Barometric Pressure .....	: 101.6kPa

#### EUT Operation:

Input Voltage .....	: AC 230V/50Hz for mode 1; Battery 3.7V for mode 2
Operating Mode .....	: Mode 1: Charging mode Mode 2: BT connected mode

### 6.2.2 Block Diagram of Setup

The ESD test was performed in accordance with the IEC 61000-4-2.

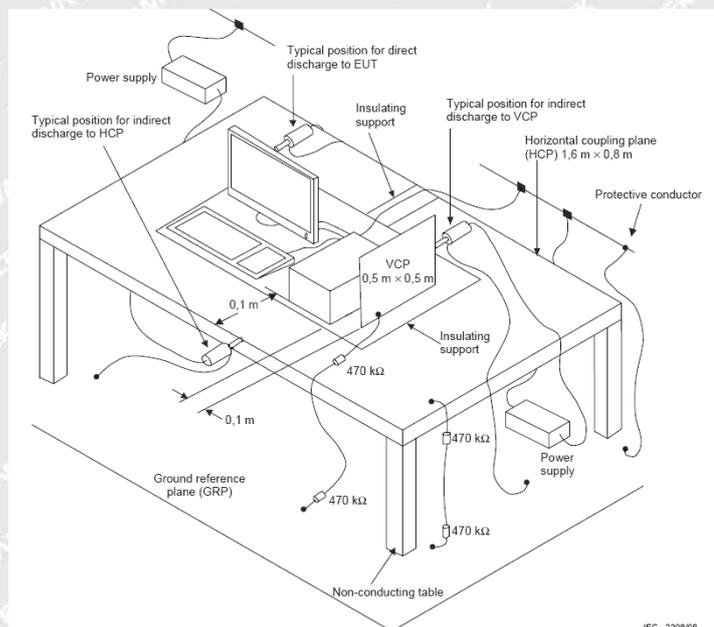





### 6.3 Continuous RF Electromagnetic Field Disturbances

Test Requirement .....	: EN 55035
Test Method .....	: IEC 61000-4-3
Test Result .....	: Pass
Frequency Range .....	: 80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz
Test level .....	: 3V/m
Modulation .....	: 80%, 1kHz Amplitude Modulation.
Face of EUT.....	: Front, Back, Left, Right
Antenna polarisation.....	: Horizontal & Vertical
Test Distance .....	: 3m

#### 6.3.1 E.U.T. Operation

##### Operating Environment:


Temperature.....	: 23.3°C
Humidity .....	: 51.5%RH
Barometric Pressure .....	: 101.4kPa

##### EUT Operation:

Input Voltage.....	: AC 230V/50Hz for mode 1; Battery 3.7V for mode 2
Operating Mode .....	: Mode 1: Charging mode Mode 2: BT connected mode

#### 6.3.2 Block Diagram of Setup

The Radio-frequency electromagnetic fields Immunity test was performed in accordance with the IEC 61000-4-3.

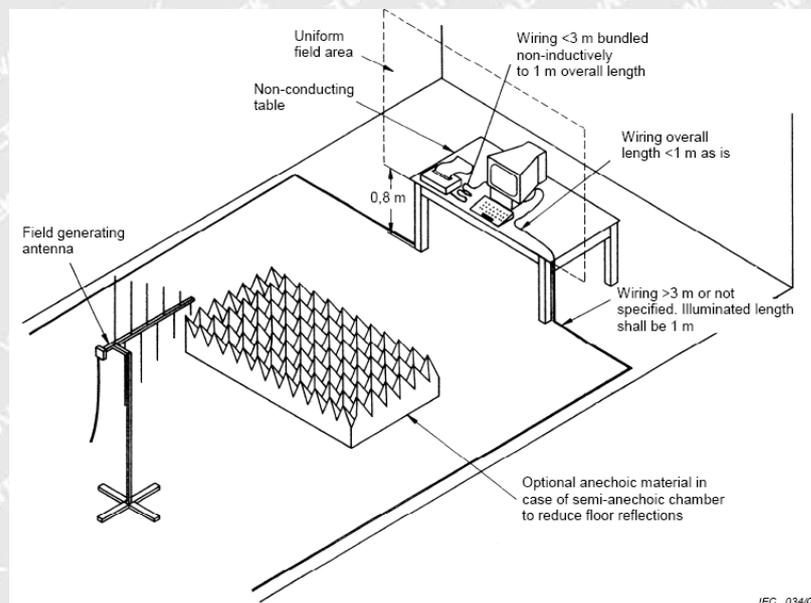



### 6.3.3 Test Results

Frequency	Face of EUT	Antenna polarisation	Test Level	Step Size	Dwell Time	Performance Criterion	Result
80 to 1000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
80 to 1000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
1800MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
2600MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
3500MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Horizontal	3V/m	1%	1s	A	Pass*
5000MHz	Front, Back, Left, Right	Vertical	3V/m	1%	1s	A	Pass*

Remark:

- \* During the test no deviation was detected to the selected operation mode(s)



## 6.4 Electrical Fast Transients (EFT)

Test Requirement .....	: EN 55035
Test Method .....	: IEC 61000-4-4
Test Result .....	: Pass
Test Level .....	: 1.0kV on AC Mains
Polarity .....	: Positive & Negative
Repetition Frequency.....	: 5kHz
Burst Duration .....	: 5/50ns
Test Duration .....	: 2 minutes per level & polarity

### 6.4.1 E.U.T. Operation

#### Operating Environment:

Temperature.....	: 22.7°C
Humidity .....	: 51.5%RH
Barometric Pressure.....	: 101.6kPa

#### EUT Operation:


Input Voltage.....	: AC 230V/50Hz
Operating Mode .....	: Charging mode

# WALTEK



### 6.4.2 Block Diagram of Setup

The Electrical Fast Transients Immunity test was performed in accordance with the IEC 61000-4-4.

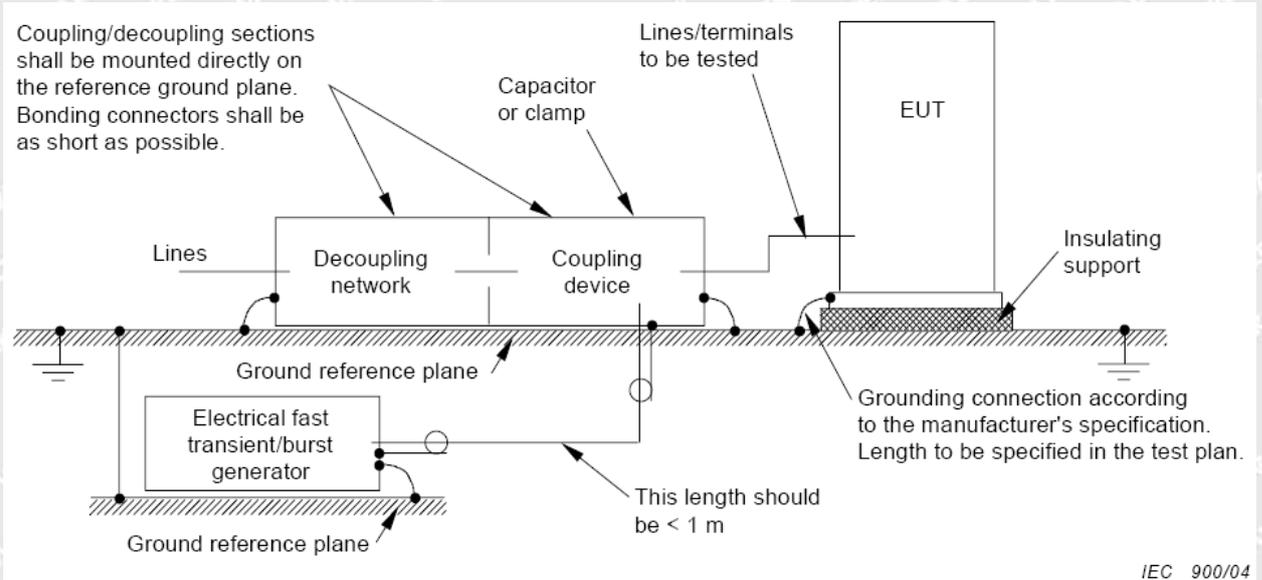

### 6.4.3 Test Results

Test Port	Test Level(kV)	Performance Criterion	Result
Line-Neutral	±1.0	B	Pass*

Remark:

\* During the test no deviation was detected to the selected operation mode(s)



## 6.5 Surge

**Test Requirement** ..... : EN 55035

**Test Method** ..... : IEC 61000-4-5

**Test Result** ..... : Pass

**Test level** ..... :  $\pm 1\text{kV}$  Live to Neutral,  $\pm 2\text{kV}$  Live to PE and Neutral to PE

**Interval** ..... : 60s between each surge

**No. of surges** ..... : five positive and five negative pulses each at  $0^\circ$ ,  $90^\circ$ ,  $180^\circ$  and at  $270^\circ$

### 6.5.1 E.U.T. Operation

#### Operating Environment:

**Temperature** ..... :  $22.6^\circ\text{C}$

**Humidity** ..... : 51.5%RH

**Barometric Pressure** ..... : 101.6kPa


#### EUT Operation:

**Input Voltage** ..... : AC 230V/50Hz

**Operating Mode** ..... : Charging mode

### 6.5.2 Block Diagram of Setup

The Surge Immunity test was performed in accordance with the IEC 61000-4-5.

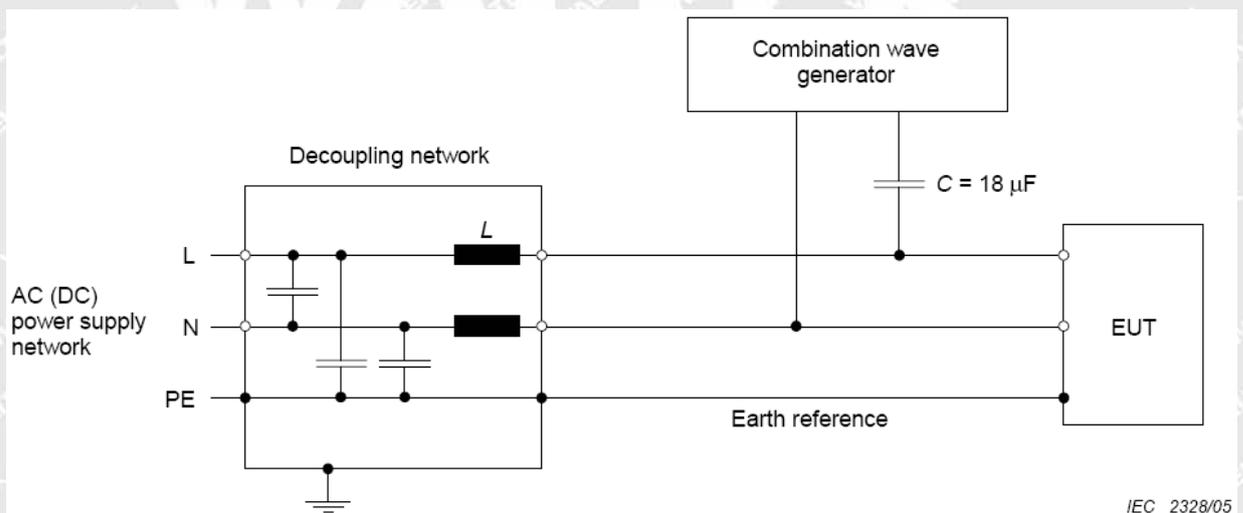



### 6.5.3 Test Result

Test Port	Applied Voltage (kV)	Performance criterion	Result
Between Phase And Phase	$\pm 1$	B	N/A
Between Live And Neutral	$\pm 1$	B	Pass*
Between Live And Earth	$\pm 2$	B	N/A
Between Neutral And Earth	$\pm 2$	B	N/A

Remark:

- \* During the test no deviation was detected to the selected operation mode(s)

# WALTEK



## 6.6 Continuous Induced RF Disturbance

**Test Requirement** ..... : EN 55035

**Test Method** ..... : IEC 61000-4-6

**Test Result** ..... : Pass

**Frequency Range** ..... : 0.15 to 10MHz, 10 to 30MHz, 30 to 80MHz

**Test level** ..... : 3V r.m.s. /3~1V r.m.s. / 1V r.m.s. (unmodulated emf into 150  $\Omega$ )

**Modulation** ..... : 80%, 1kHz Amplitude Modulation.

### 6.6.1 E.U.T. Operation

**Operating Environment:**

**Temperature** ..... : 22.7°C

**Humidity** ..... : 51.6%RH

**Barometric Pressure** ..... : 101.6kPa


**EUT Operation:**

**Input Voltage** ..... : AC 230V/50Hz

**Operating Mode** ..... : Charging mode

### 6.6.2 Block Diagram of Setup

The Injected Currents Immunity test was performed in accordance with the IEC 61000-4-6.

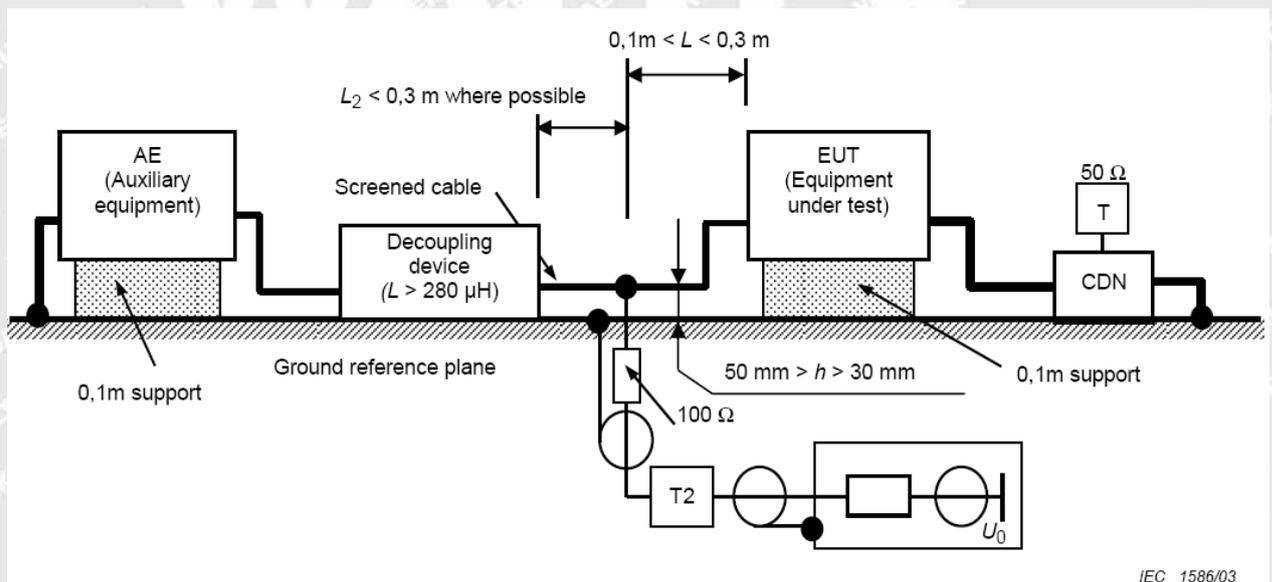



### 6.6.3 Test Results

Frequency	Line	Test Level	Modulation	Step Size	Dwell Time	Performance Criterion	Result
0.15MHz to 10MHz	2 Wire AC Supply Cables	3Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*
10MHz to 30MHz	2 Wire AC Supply Cables	3 to 1 Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*
30MHz to 80MHz	2 Wire AC Supply Cables	1Vr.m.s.	80%, 1kHz Amp. Mod.	1%	1s	A	Pass*

Remark:

- \* During the test no deviation was detected to the selected operation mode(s)

# WALTEK



## 6.7 Voltage Dips and Interruptions

Test Requirement .....	: EN 55035
Test Method .....	: IEC 61000-4-11
Test Result .....	: Pass
Test Level(Voltage reduction) .....	: >90% & 30 % of Induction
No. of Dips / Interruptions .....	: 1 per Level at 20ms intervals

### 6.7.1 E.U.T. Operation

#### Operating Environment:


Temperature .....	: 22.8°C
Humidity .....	: 51.6%RH
Barometric Pressure .....	: 101.6kPa

#### EUT Operation:

Input Voltage .....	: AC 230V/50Hz
Operating Mode .....	: Charging mode

### 6.7.2 Block Diagram of Setup

The Voltage Dips and Interruptions Immunity test was performed in accordance with the IEC 61000-4-11.

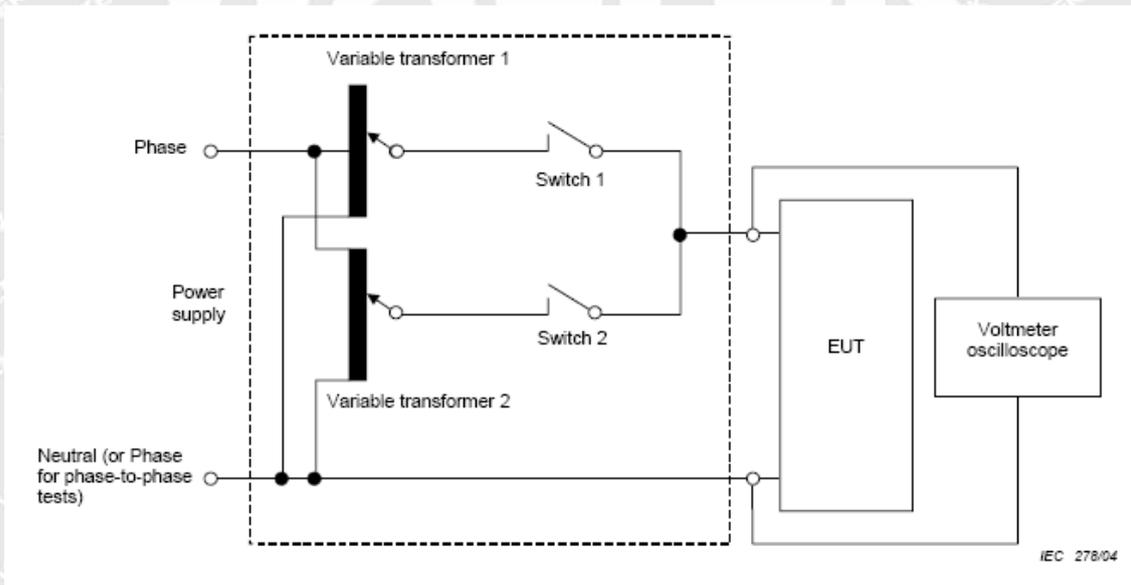



### 6.7.3 Test Results

Test Item	Test Level in %U <sub>T</sub>	Performance criterion	50Hz		60Hz	
			Duration	Result	Duration	Result
Voltage Dips	< 5	B	0.5	Pass*	0.5	Pass*
	70	C	25	Pass*	30	Pass*
Voltage Interruptions	< 5	C	250	Pass*	300	Pass*

Remark:

\* During the test no deviation was detected to the selected operation mode(s)

# WALTEK



## 7 Photographs – Test Setup

### 7.1 Photograph – Mains Terminal Disturbance Voltage Test Setup



### 7.2 Photograph – Radiated Emission Test Setup, 30MHz to 1GHz





### 7.3 Photograph – Radiated Emission Test Setup, 1GHz to 6GHz




### 7.4 Photograph – ESD Immunity Test Setup





### 7.5 Photograph – Continuous RF Electromagnetic Field Disturbances Test Setup

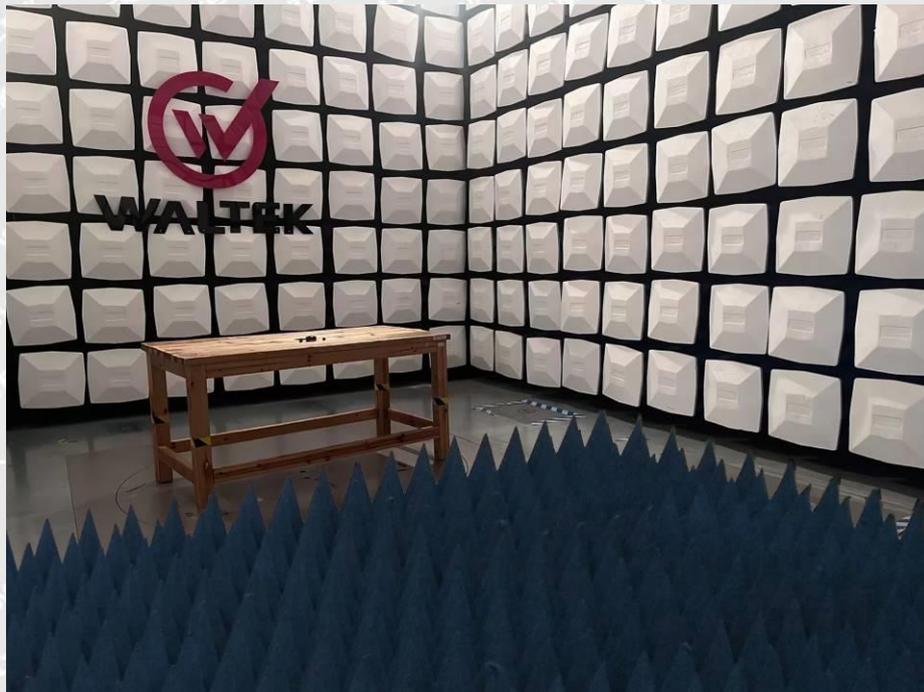

### 7.6 Photograph – EFT Immunity Test Setup






### 7.7 Photograph – Surge Immunity Test Setup



### 7.8 Photograph – Continuous Induced RF Disturbance Test Setup

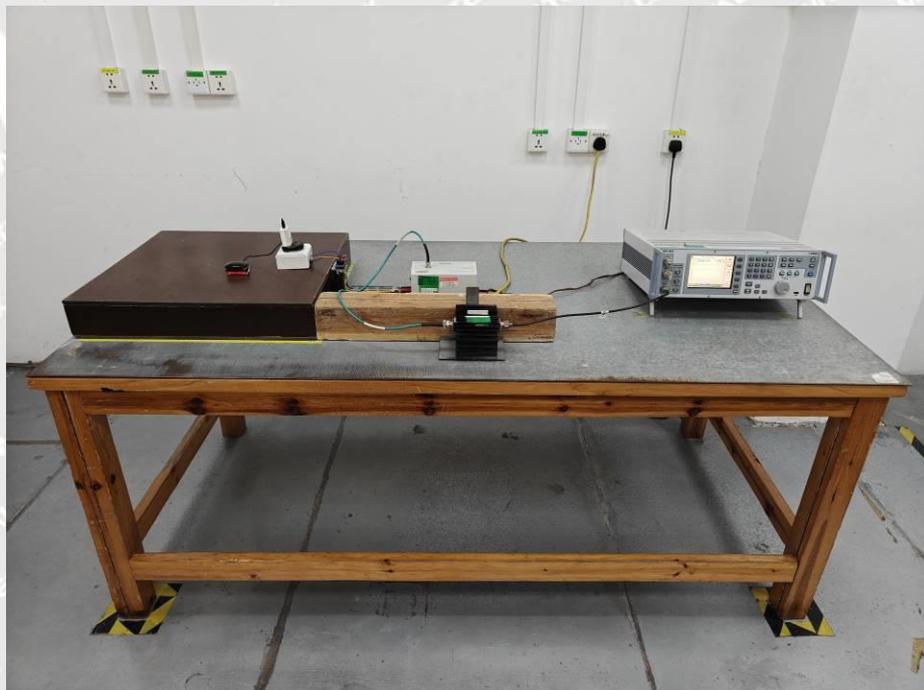



### 7.9 Photograph – Voltage Dips and Interruptions Immunity Test Setup



# WALTEK



## 8 Photographs – Constructional Details

### 8.1 EUT – External Photos





===== End of Report =====

# WALTEK