

# **EMC Test Report**

Report No.: AGC05443250712EE01

**PRODUCT DESIGNATION**: Bamboo weather station

**BRAND NAME** : N/A

MODEL NAME : M06665

**APPLICANT**: MID OCEAN BRANDS B.V.

**DATE OF ISSUE** : Aug. 01, 2025

**STANDARD(S)** : EN IEC 61000-6-3:2021 EN IEC 61000-6-1:2019

**REPORT VERSION**: V1.0


Attestation of Global Conce (Shenzhen) Co., Ltd



Page 2 of 30

#### REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 01, 2025	Valid	Initial release





#### **Table of contents**

1. Genera	al information	4
2. Descri	ption of Test Configuration	5
2.1.	Technical Description of Product	5
2.2.	Description of Support Equipment	5
2.3.	Description of Test Modes	5
3. Summa	ary of Measurement Results and Uncertainty	6
3.1.	Test Specifications	6
3.2.	Description of Measurement Results	6
3.3.	Description of Measurement Uncertainty	8
4. Test Fa	acility	9
5. Measu	rement of Radiated Emissions at Frequencies up to 1 GHz	10
5.1.	Requirements	10
5.2.	Block Diagram of Test Setup	10
5.3.	Equipment Details	11
5.4.	Configuration of the EUT and method of measurement	11
5.5.	Test Summary	12
6. Measu	rement of Electrostatic discharge	14
6.1.	Requirements	14
6.2.	Block Diagram of Test Setup	14
6.3.	Equipment Details	15
6.4.	Configuration of the EUT and method of measurement	15
6.5.	Test Summary	16
7. Measu	rement of Radio-Frequency Electromagnetic Field	17
7.1.	Requirements	17
7.2.	Block Diagram of Test Setup	18
7.3.	Equipment Details	19
7.4.	Configuration of the EUT and method of measurement	19
7.5.	Test Summary	20
8. Photog	graphs of Test Setup	21
9. Photog	graphs of EUT	23



Report No.: AGC05443250712EE01 Page 4 of 30

# 1. General information

1. General information		
Applicant	MID OCEAN BRANDS B.V.	
Address	Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.	
Manufacturer	MID OCEAN BRANDS B.V.	
Address	Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.	
Factory	MID OCEAN BRANDS B.V.	
Address	Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong Kong.	
Product Designation	Bamboo weather station	
Brand Name	N/A	
Test Model	MO6665	
Series Model(s)	N/A	
Difference Description	N/A	
Deviation from Standard	No any deviation from the test method	
Date of receipt of test item	Jul. 10, 2025	
Date of Test	Jul. 10, 2025~ Aug. 01, 2025	
Test Result	Pass	
Test Report Form No	AGCER-EMC-GEN-V1	
Note: The test results of this report relate only to the tested sample identified in this report.		

Prepared By	Jasiel xie	
	Jasiel Xie (Project Engineer)	Aug. 01, 2025
Reviewed By	Bibo zhang	
	Bibo Zhang (Reviewer)	Aug. 01, 2025
Approved By	Angole Li	
	Angela Li (Authorized Officer)	Aug. 01, 2025




Page 5 of 30

# 2. Description of Test Configuration

### 2.1. Technical Description of Product

Categorization of Equipment	Class B equipment
Test arrangements of EUT	Table-top
Hardware Version	V1.0
Software Version	V1.0
Highest Internal Frequency	Less than 108MHz
EUT Input Rating	Input:DC5V 2A, 9V 3A
EUT Output Rating	Output: DC5V 1A, 9V 1.1A, 9V 1.65A Wireless Output Power: 15W max
Adapter Information	N/A
Battery Information	DC 3V

## **Connection Diagram of Host System**



## I/O Port Information (⊠ Applicable ☐ Not Applicable)

Port Type	Input/Output	Number	Cable Description
DC power	ln	1	

### 2.2. Description of Support Equipment

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
	-		-		

### 2.3. Description of Test Modes

No.	Test Mode Description
1	Normal operation mode



Page 6 of 30

# 3. Summary of Measurement Results and Uncertainty

# 3.1. Test Specifications

EN IEC 61000-6-3:2021	Electromagnetic compatibility (EMC) - Part 6-3: Generic standards – Emission standard for equipment in residential environments
EN IEC 61000-6-1:2019	Electromagnetic compatibility (EMC) - Part 6-1: Generic standards – Immunity standard for residential, commercial and light-industrial environments

## 3.2. Description of Measurement Results

Test items	Test Standard(s)	Verdict
Radiated emissions at frequencies up to 1 GHz	EN IEC 61000-6-3	Pass
Electrostatic discharge	IEC 61000-4-2 a	Pass
Radio-frequency electromagnetic field	IEC 61000-4-3 a	Pass

#### Note:

a. The applicable versions of the basic standards are defined in the standard which listed in the test specification.



Page 7 of 30

### Performance table

	Performance Criteria for Immunity				
Performance criterion A	The EUT shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the EUT is used as intended. If the performance level is not specified by the manufacturer, this may be derived from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.				
Performance criterion B	The EUT shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. However, during the test degradation of performance is allowed but no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation and what the user may reasonably expect from the equipment if used as intended.				
Performance criterion C	Temporary loss of function is allowed during the test, provided the function is self-recoverable or can be restored by the operation of the controls.				



Page 8 of 30

## 3.3. Description of Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Conducted emissions from the AC mains power ports	Uc = ±2.9 dB
Radiated emissions at frequencies up to 1 GHz	Uc = ±3.9 dB



Page 9 of 30

## 4. Test Facility

Laboratory name: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Laboratory Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laborat ories (CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This laboratory also meets the requirements of any additional program requirements in the Electrical field.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

CAB identifier: CN0063

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

VCCI Membership No.: 4112

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered in accordance with VCCI Council Rules.

VCCI Registration No. C-20098 for conducted emissions at AC main power ports

VCCI Registration No. T-20102 for conducted emissions at telecommunication ports

VCCI Registration No. R-20136 for radiated emissions below 1GHz

VCCI Registration No. G-20132 for radiated emissions above 1GHz



Page 10 of 30

# 5. Measurement of Radiated Emissions at Frequencies up to 1 GHz


#### 5.1. Requirements

Requirements for radiated emissions at frequencies up to 1 GHz at 3m distance

Test facility	Detector type/ bandwidth	Frequency Range (MHz)	Limits dB(µV/m)	Measurement specifications
04.0	Quasi-peak/	30 to 230	40	Instrumentation: CISPR 16-1-1, Clauses 4, 5 Antennas: CISPR 16-1-4, Clause 4.5
SAC	120kHz	230 to 1000	47	Test Site: CISPR 16-1-4, Clause 6 Method: CISPR 16-2-3, Clause 7.6

#### Note:

### 5.2. Block Diagram of Test Setup

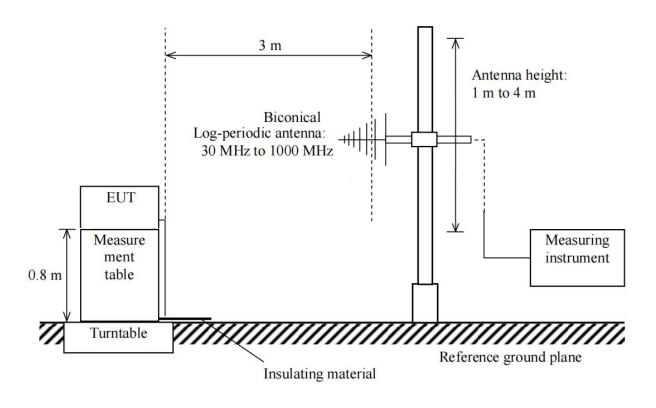

<sup>1.</sup> The lower limit shall apply at the transition frequency.



Page 11 of 30

#### 5.3. Equipment Details

#### Measuring Instruments

Instruments No.	Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due
AGC-EM-E046	Test Receiver	R&S	ESCI	100096	2025-01-14	2026-01-13
AGC-EM-E001	Antenna	SCHWARZBECK	VULB9168	D69250	2025-03-14	2027-03-13
AGC-EM-A138	Attenuator	East sheep	LM-XX-6-5W	N/A	2025-05-16	2027-05-15

#### Measuring Software

Software No.	Software Name	Manufacturer	Details
AGC-EM-S003	EZ-EMC	FARA	For EMC Measurement, Version RA-03A

#### 5.4. Configuration of the EUT and method of measurement


- a. The EUT was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, the EUT was placed on the top surface of a measurement table, 0.8 m high from the horizontal reference plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 10 cm non-conductive covering to insulate the EUT from the ground plane.
- b. Support equipment, if needed, was placed as per CISPR 16-2-3.
- c. All I/O cables were positioned to simulate typical actual usage as per CISPR 16-2-3.
- d. The maximum receiving level of radiated emissions from the EUT was measured while the turntable was rotated from 0° to 360° and the antenna height was scanned between 1 m and 4 m. The cables were laid out to attain the maximum level of radiated emissions.
- e. The more description of the tests, the test methods, and the test set-ups are given in the applicable test standard.
- f. Record at least six highest emissions relative to the limits at each frequency of interest unless the emission is 10 dB or greater below the limit.
- g. A radiated emission is calculated by the following equation:
  - Measurement Level  $dB(\mu V/m) = Receiver reading dB(\mu V) + Factor(dB/m)$
  - Factor(dB/m) = Antenna Factor(dB/m) + Cable Loss(dB)
  - Margin= Limit-Level



Report No.: AGC05443250712EE01 Page 12 of 30


### 5.5. Test Summary


Test Engineer	Alex Yang	Temperature	22.1 ℃
Test Date	2025-07-14	Air Pressure	985 Mbar
Worst Mode	Mode 1	Relative Humidity	56.4 %
Verdict	Pass		

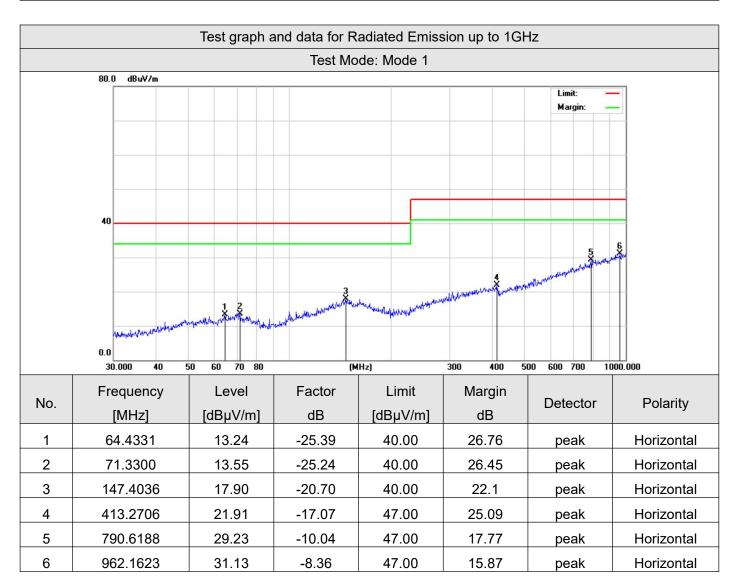



Page 13 of 30

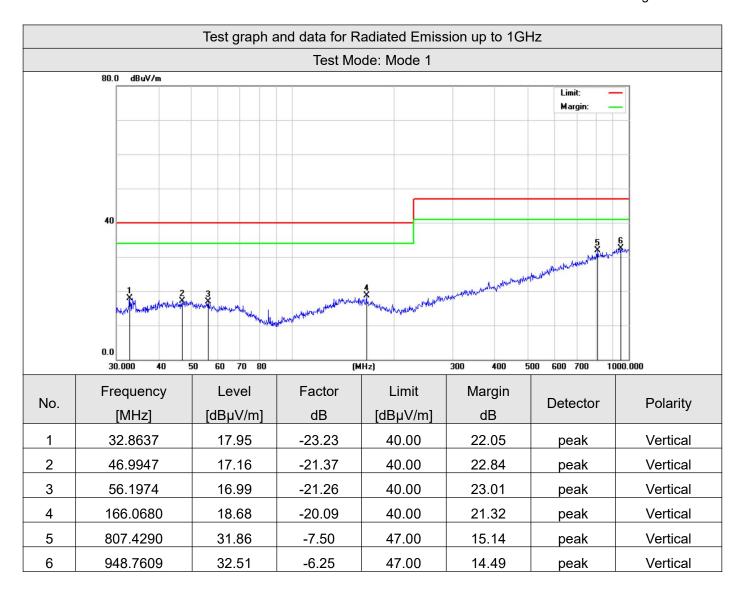






# 6. Measurement of Electrostatic discharge

#### 6.1. Requirements

Port	Enclosure
Basic Standard	IEC 61000-4-2
Test Level	±8.0 kV (Air Discharge) ±4.0 kV (Contact Discharge) ±4.0 kV (Indirect Discharge)
Required Performance Criterion	В
Time Between Each Discharge:	1 second
Number of Discharge for Each Applied Voltage	10

### 6.2. Block Diagram of Test Setup

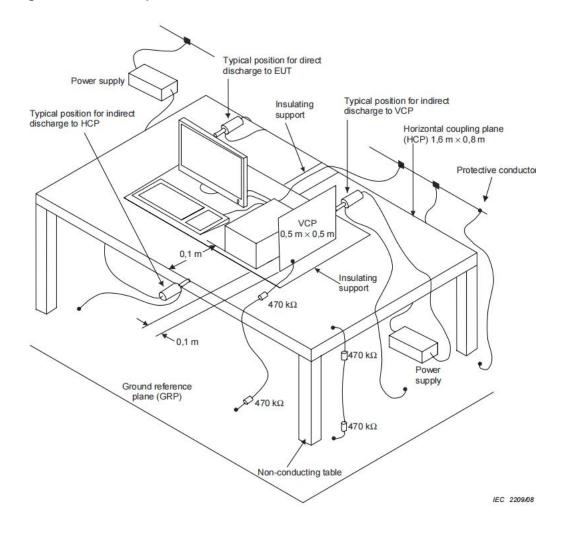



Page 15 of 30

#### 6.3. Equipment Details

#### Measuring Instruments

Instruments No.	Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due
AGC-EM-E013	ESD Simulator	Schaffner	NSG 438	782	2024-11-12	2025-11-11

#### Measuring Software

Software No.	Software Name	Manufacturer	Details

#### 6.4. Configuration of the EUT and method of measurement

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were completed.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the EUT. The ESD generator was positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the HCP.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m×0.5m) was placed vertically to and 0.1 meters from the EUT.
- i. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.




Report No.: AGC05443250712EE01 Page 16 of 30

### 6.5. Test Summary

Test Engineer	Ikun Yu	Temperature	20.8 ℃
Test Date	2025-07-16	Air Pressure	985 Mbar
Test Mode(s)	Mode 1	Relative Humidity	51.3 %
Verdict	Pass		

Voltage	Coupling	Observation	Performance
±4kV	Contact Discharge	No degradation of performance	A
±2KV, ±4kV, ±8kV	Air Discharge	No degradation of performance	A
±4kV	Indirect Discharge HCP	No degradation of performance	A
±4kV	Indirect Discharge VCP	No degradation of performance	А

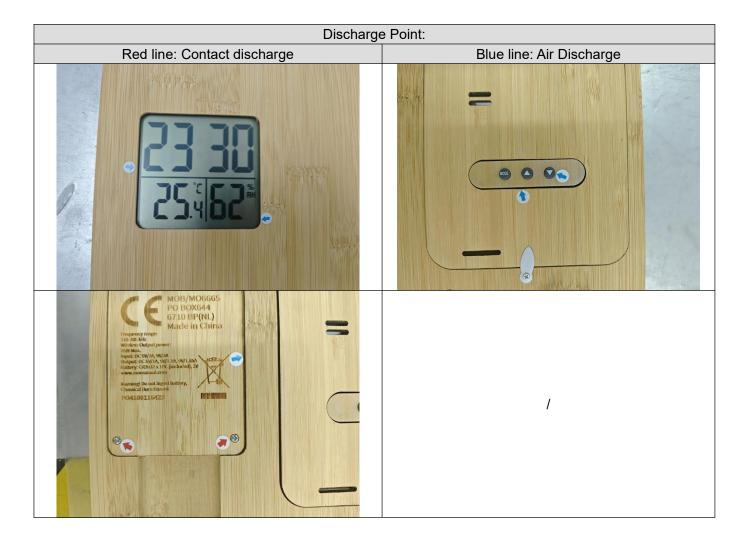



Page 17 of 30


## 7. Measurement of Radio-Frequency Electromagnetic Field

#### 7.1. Requirements

Port	Enclosure
Basic Standard	IEC 61000-4-3
Required Performance Criterion	A
Test Level	3V/m with 80% AM. 1kHz Modulation at 80 to 1000MHz 3V/m with 80% AM. 1kHz Modulation at 1400 to 6000MHz
Antenna polarization	Vertical and Horizontal
Step size increment <sup>a</sup>	1%
Dwell time <sup>b</sup>	≤5 seconds
Test Distance	3m
EUT position facing antenna	Front side, back side, left side and right side


#### Notes:

- a. Recognizing that a 1% step size is preferred, the frequency range can be swept incrementally with a step size not exceeding 4% of the previous frequency with a test level of twice the value of the specified test level in order to reduce the testing time for equipment requiring testing in multiple configurations and/or long cycle times.
- b. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond. However, the dwell time shall not exceed 5 seconds at each of the frequencies during the scan. The time to exercise the EUT is not interpreted as a total time of a program or a cycle but related to the reaction time in case of failure of the EUT.





## 7.2. Block Diagram of Test Setup

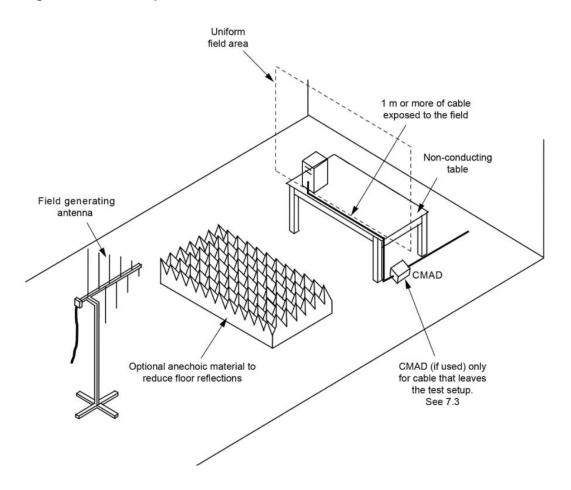



Page 19 of 30

#### 7.3. Equipment Details

#### Measuring Instruments

Instruments No.	Instruments	Manufacturer	Model	S/N	Cal. Date	Cal. Due
AGC-EM-E005	Power Meter	R&S	NRVD	8323781027	2025-03-24	2027-03-23
AGC-EM-E016	Power Amplifier	KALMUS	7100LC	04-02/17-06-001	2024-07-24	2025-07-23
AGC-EM-E028	Wideband Antenna	ETS-LINDGREN	3142C	60447	N/A	N/A
AGC-EM-E029	Antenna	ETS	3117	34609	2025-03-27	2026-03-26
AGC-EM-E035	Power Probe	R&S	URV5-Z4	100124	2025-03-24	2027-03-23
AGC-EM-E040	Directional Coupler	Werlatone	C5571-10	99463	2024-02-01	2026-01-31
AGC-EM-E041	Directional Coupler	Werlatone	C6026-10	99482	2024-02-01	2026-01-31
AGC-EM-E080	Power Amplifier	Rflight	NTWPA-2560100	17063183	2024-07-24	2025-07-23
AGC-EM-E115	Signal Generator	AGILENT	N5182A	MY49060745	2025-03-07	2026-03-06
AGC-EM-E160	Power Amplifier	TESEQ	CBA3G-100	T43913	2025-05-21	2026-05-20

#### Measuring Software

Software No.	Software Name	Manufacturer	Details
AGC-EM-S006	TS+[JS35-RS]	Tonscend	For EMC Measurement, Version 2.0.1.8

### 7.4. Configuration of the EUT and method of measurement

- a. The Equipment Under Test (EUT) was positioned within the Uniform Field Area (UFA) on a supporting table, ensuring a 3-meter separation from the transmitting antenna. This setup aligns with the calibrated square area, guaranteeing field uniformity during testing. The supporting units were strategically located outside the UFA to avoid any potential interference. Nonetheless, the cables connected to the EUT were intentionally exposed to the precisely calibrated field within the UFA.
- b. Before testing, it will verify the proper operation of the test equipment/system. This verification will involve measuring the field strength at one point within the Uniform Field Area (UFA) at various frequencies.
- c. The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- d. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.



Page 20 of 30

## 7.5. Test Summary

Test Engineer	Alex Yang	Temperature	22.4 ℃
Test Date	2025-07-15	Air Pressure	985 Mbar
Test Mode(s)	Mode 1	Relative Humidity	57.9 %
Verdict	Pass		

Frequency	Exposed Side	Field Strength (V/m)	Observation	Performance
	Front		No degradation of performance	A
80MHz to 1GHz	Left	3V/m (rms)	No degradation of performance	A
	Rear		No degradation of performance	Α
	Right		No degradation of performance	A
	Front	3V/m (rms)	No degradation of performance	A
1.4GHz to 6GHz	Left		No degradation of performance	Α
	Rear		No degradation of performance	Α
	Right		No degradation of performance	A




# 8. Photographs of Test Setup




Radiated emissions at frequencies up to 1 GHz




Electrostatic discharge





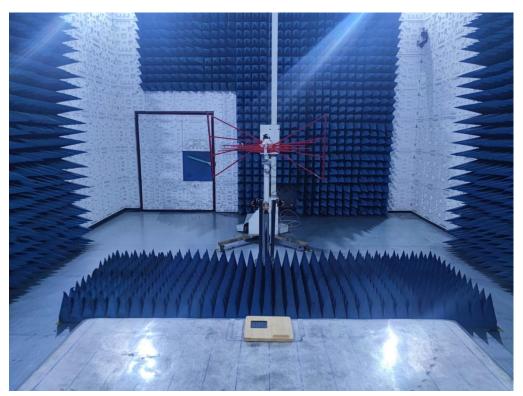

Radio-frequency electromagnetic field up to 1 GHz

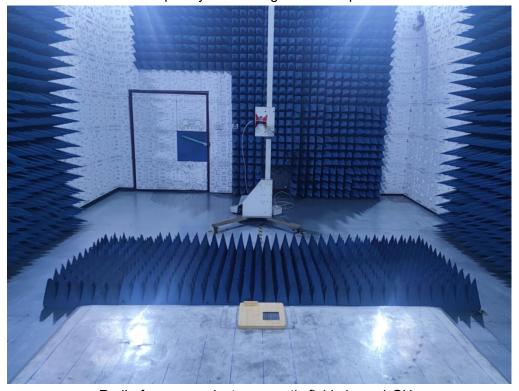

Radio-frequency electromagnetic field above 1 GHz




# 9. Photographs of EUT

#### ALL VIEW-1 OF EUT



TOP VIEW OF EUT








### **BOTTOM VIEW OF EUT**



FRONT VIEW OF EUT








## **BACK VIEW OF EUT**



LEFT VIEW OF EUT



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






### **RIGHT VIEW OF EUT**



OPEN VIEW OF EUT (FIGURE 1)




Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.







# INTERNAL VIEW OF EUT (FIGURE 1)

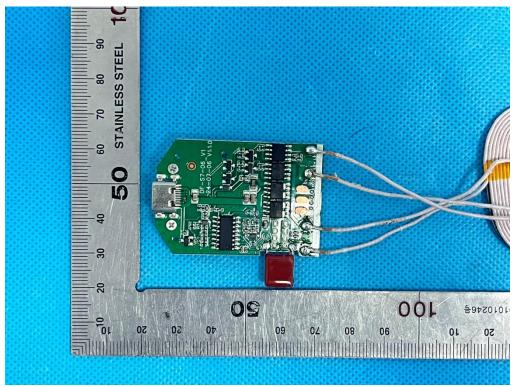

## INTERNAL VIEW OF EUT (FIGURE 2)

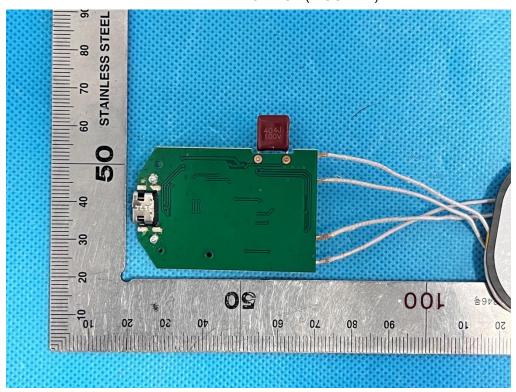


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.







# INTERNAL VIEW OF EUT (FIGURE 3)

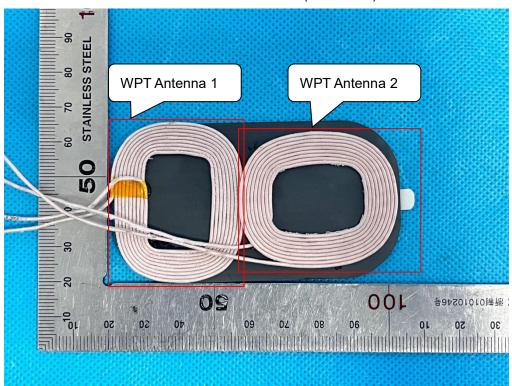

### INTERNAL VIEW OF EUT (FIGURE 4)

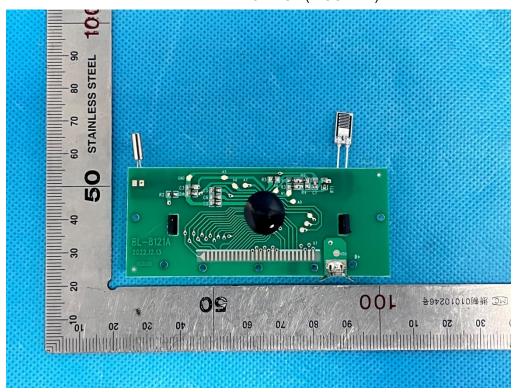


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





# INTERNAL VIEW OF EUT (FIGURE 5)

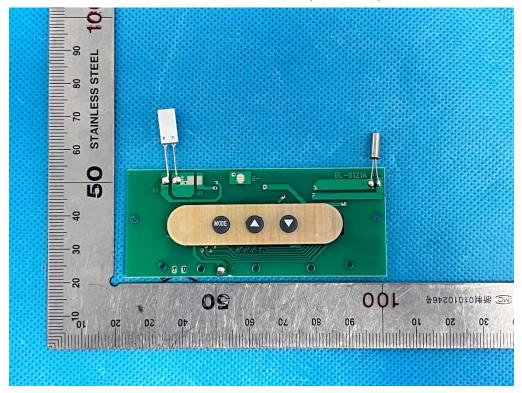



Page 30 of 30

# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

----End of Report----



# **EMC Test Report**

Report No.: AGC05443250712ER01

**PRODUCT DESIGNATION**: Bamboo weather station

**BRAND NAME** : N/A

MODEL NAME : MO6665

**APPLICANT**: MID OCEAN BRANDS B.V.

**DATE OF ISSUE** : Aug. 01, 2025

**STANDARD(S)** : ETSI EN 301 489-1 V2.2.3 (2019-11) ETSI EN 301 489-3 V2.3.2 (2023-01)

**REPORT VERSION**: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 49


# **Report Revise Record**

Report Version	on R	Revise Time	Issued Date	Valid Version	Notes
V1.0		1	Aug. 01, 2025	Valid	Initial Release



## **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Objective	7
2.3 Test Items and The Results	7
2.4 General Performance Criteria	9
2.5 Description of Test Modes	11
3. Setup of Equipment Under Test	12
3.1 Setup Configuration of EUT	12
3.2 Support Equipment	12
4. Test Environment	13
4.1 Address of The Test Laboratory	13
4.2 Test Facility	13
4.3 Environmental Conditions	14
4.4 Measurement Uncertainty	14
4.5 List of Equipment Used	15
5. Measurement of Radiated Emissions at Frequencies up to 1GHz	17
5.1. Requirements	17
5.2. Block Diagram of Test Setup	17
5.3. Configuration of the EUT and method of measurement	18
5.4. Test Result	19
6. Measurement of Conducted Emissions from the AC Mains Power Ports	21
6.1. Requirements	21
6.2. Block Diagram of Test Setup	21
6.3. Configuration of the EUT and method of measurement	22
6.4. Test Result	23
7. Measurement of Harmonic Current Emissions	25
7.1. Requirements	25
7.2. Block Diagram of Test Setup	26
7.3. Configuration of the EUT and method of measurement	27
7.4. Test Result	27
8. Measurement of Voltage Fluctuations and Flicker	28
8.1. Requirements	28
8.2. Block Diagram of Test Setup	28
8.3. Configuration of the EUT and method of measurement	29
8.4. Test Result	29
9. Measurement of Electrostatic Discharge	30
9.1. Requirements	30
9.2. Block Diagram of Test Setup	30
9.3. Configuration of the EUT and method of measurement.	31





9.4. Test Result	32
10. Measurement of Radio-Frequency Electromagnetic Field	33
10.1. Requirements	33
10.2. Block Diagram of Test Setup	33
10.3. Configuration of the EUT and method of measurement	34
10.4. Test Result	
11. Measurement of Radio-Frequency Common Mode	36
11.1. Requirements	
11.2. Block Diagram of Test Setup	36
11.3. Configuration of the EUT and method of measurement	37
11.4. Test Result	
12. Measurement of Electrical Fast Transient/Burst	38
12.1. Requirements	38
12.2. Block Diagram of Test Setup	38
12.3. Configuration of the EUT and method of measurement	
12.4. Test Result	39
13. Measurement of Surges	40
13.1. Requirements	40
13.2. Block Diagram of Test Setup	40
13.3. Configuration of the EUT and method of measurement	
13.4. Test Result	41
14. Measurement of Voltage Dips and Interruptions	42
14.1. Requirements	
14.2. Block Diagram of Test Setup	42
14.3. Configuration of the EUT and method of measurement	
14.4. Test Result	
Appendix I: Photographs of Test Setup	44
Appendix II: Photographs of Test EUT	



Page 5 of 49

# 1. General Information

MID OCEAN BRANDS B.V.
Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong
Kong.
MID OCEAN BRANDS B.V.
Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong
Kong.
MID OCEAN BRANDS B.V.
Unit 711-716, 7/F., Tower A, 83 King Lam Street, Cheung Sha Wan, Kowloon, Hong
Kong.
Bamboo weather station
N/A
MO6665
N/A
N/A
Jul. 10, 2025
Jul. 10, 2025~ Aug. 01, 2025
No any deviation from the test method
Normal
Pass
AGCER-EU-EMC_SRD-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jasiel xie	
	Jasiel Xie (Project Engineer)	Aug. 01, 2025
Reviewed By	Bibo zhang	
	Bibo Zhang (Reviewer)	Aug. 01, 2025
Approved By	Angole Li	
	Angela Li (Authorized Officer)	Aug. 01, 2025



Page 6 of 49

## 2. Product Information

## 2.1 Product Technical Description

Product Designation	Bamboo weather station	
Test Model	MO6665	
Hardware Version	V1.0	
Software Version	V1.0	
Power Supply	DC 9V from Adapter	
Input Rating	Input:DC5V 2A, 9V 3A	
Output Rating	Output: DC5V 1A, 9V 1.1A, 9V 1.65A Wireless Output Power: 15W max	
WPT Technical Parameters		
Operation Frequency Range	110-205kHz	
Modulation Type	ASK	
Antenna Designation	Coil Antenna	

Note: For more details, refer to the user's manual of the EUT.



Page 7 of 49

## 2.2 Objective

Perform Electro Magnetic Interference (EMI) and Electro Magnetic Susceptibility (EMS) tests for CE Marking.

## 2.3 Test Items and The Results

The tests were performed according to following standards:

EN 301 489-1 V2.2.3 (2019-11)	Electro Magnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements; Harmonized Standard for Electro Magnetic Compatibility
EN 301 489-3 V2.3.2 (2023-01)	Electro Magnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz; Harmonised Standard for Electro Magnetic Compatibility

Test items are been completed as follows (ETSI EN 301489-1):

Phenomenon	Application	Equ	uipment test requiren	nent
Prienomenon	Application	fixed use	vehicular use	portable use
Radiated emission	enclosure of ancillary equipment	applicable for stand alone testing	applicable for stand alone testing	applicable for stand alone testing
	DC power input/output port	applicable	applicable	not applicable
Conducted emission	AC mains input/output port	applicable	not applicable	not applicable
	Telecommunication port	applicable	not applicable	not applicable
Harmonic current emissions	AC mains input port	applicable	not applicable	not applicable
Voltage fluctuations and flicker	AC mains input port	applicable	not applicable	not applicable
RF electromagnetic Field (80 MHz to 6000 MHz)	enclosure	applicable	applicable	applicable
Electrostatic discharge	enclosure	applicable	not applicable	applicable
Fast Transients	signal, Telecommunication and control ports,	applicable	not applicable	not applicable
Common mode	DC and AC power ports	applicable	not applicable	not applicable
RF common mode	Signal telecommunication and control ports	applicable	applicable	not applicable
0,15 MHz to 80 MHz	DC and AC powerports	applicable	applicable	not applicable
transients and surges	DC power inputports	not applicable	applicable	not applicable
voltage dips and interruptions	AC mains powerinput ports	applicable	not applicable	not applicable
surges, line toline and line toground	AC mains power input ports, telecommunication ports	applicable	not applicable	not applicable



Page 8 of 49

## The EUT have been tested according to the applicable standards as referenced below:

EMISSION (EN 301 4	89-1 §7.1)	
Test items	Test Standard(s)	Verdict
Radiated Emission	EN 55032	Pass
Conducted Emission, DC ports	EN 55032	Not applicable
Conducted Emission, AC ports	EN 55032	Pass
Conducted Emission, Telecom ports	EN 55032	Not applicable
Harmonic Current Emissions	EN IEC 61000-3-2	Pass
Voltage Fluctuations & Flicker	EN 61000-3-3	Pass
IMMUNITY (EN 301 4	89-1 §7.2)	
Electrostatic Discharge	IEC 61000-4-2 a	Pass
Radiated RF Electromagnetic Field	IEC 61000-4-3 a	Pass
Electrical Fast Transient/Burst	IEC 61000-4-4 a	Pass
Transients and Surges, DC ports	ISO 7637-1, -2	Not applicable
Surge Immunity, AC ports	IEC 61000-4-5 a	Pass
Radio-Frequency Common mode	IEC 61000-4-6 a	Pass
Voltage dips and interruptions	IEC 61000-4-11 a	Pass
NI (	1	

### Note:

a. The applicable versions of the basic standards are defined in the standard which listed in the test specification.



Page 9 of 49

#### 2.4 General Performance Criteria

### Performance criteria for continuous phenomena

During the test, the equipment shall:

- · continue to operate as intended;
- · not unintentionally transmit;
- · not unintentionally change its operating state;
- · not unintentionally change critical stored data.

### ■ Performance criteria for transient phenomena

- For all ports and transient phenomena with the exception described below, the following applies:
  - The application of the transient phenomena shall not result in a change of the mode of operation
  - (e.g. unintended transmission) or the loss of critical stored data.
  - After application of the transient phenomena, the equipment shall operate as intended.
- For surges applied to symmetrically operated wired network ports intended to be connected directly to outdoor lines the following criteria applies:
  - For products with only one symmetrical port intended for connection to outdoor lines, loss of function is allowed, provided the function is self-recoverable, or can be otherwise restored. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.
  - For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.
- For a 0 % residual voltage dip tests the following performance criteria apply:
  - The performance criteria for transient phenomena shall apply.
- For a 70 % residual voltage dip and voltage interruption tests, the following performance criteria apply:
  - in the case where the equipment is fitted with or connected to a battery back-up, the performance criteria for transient phenomena shall apply;
  - in the case where the equipment is powered solely from the AC mains supply (without the use of a parallel battery back-up) volatile user data may have been lost and if applicable the communication link need not to be maintained and lost functions should be recoverable by user or operator;
  - no unintentional responses shall occur at the end of the test, when the voltage is restored to nominal;
  - in the event of loss of function(s) or in the event of loss of user stored data, this fact shall be recorded.



Page 10 of 49

### Performance Table

According to ETSI EN 301 489-3 standard, the general performance criteria are as follows:

	EN 301 489-3 Performance Criteria_SRD					
Criteria	Criteria During Test After Test					
А	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions				
В	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions				

<sup>•</sup> performance criterion A applies for immunity tests with phenomena of a continuous nature;

Where "operate as intended" or "no loss of function" is specified, the EUT shall demonstrate correct functioning as described in EN 301 489-3 clause 5.

Where the EUT has more than one mode of operation, an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in sufficient modes to confirm there are no such unintentional responses.

<sup>•</sup> performance criterion B applies for immunity tests with phenomena of a transient nature.



Page 11 of 49

## 2.5 Description of Test Modes

No.	Test Mode Description	Worst Case
1	AC/DC Adapter(9V/3A)+EUT+Wireless load(15W)	-
2	AC/DC Adapter(5V/2A)+EUT+Wireless load(10W)	-
3	AC/DC Adapter(5V/2A)+EUT+Wireless load(5W)	-
4	AC/DC Adapter(5V/2A)+EUT+Wireless load(0W)	-

Note: All modes are pre-tested for EMI and the worst mode is finally reflected.



Page 12 of 49

# 3. Setup of Equipment Under Test

## 3.1 Setup Configuration of EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

## 3.2 Support Equipment

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Wireless Charging Load	YBZ	N/A		
2	Adapter	Xiaomi	MDY-16-EA		

### 

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	USB Cable	-			1m unshielded



Page 13 of 49

### 4. Test Environment

### 4.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

### 4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

## FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

# IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 14 of 49

### 4.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	45 % - 85 %
Pressure range (kPa)	86 - 106

## 4.4 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

- Uncertainty of Conducted Emission, Uc = ±2.9dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.9dB



Page 15 of 49

## 4.5 List of Equipment Used

• [	Radiated Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
$\boxtimes$	AGC-EM-A138	Attenuator	East sheep	LM-XX-6-5W	N/A	2025-05-16	2027-05-15	
$\boxtimes$	AGC-EM-E001	Antenna	SCHWARZBECK	VULB9168	D69250	2025-03-14	2027-03-13	
$\boxtimes$	AGC-EM-E046	Test Receiver	R&S	ESCI	100096	2025-01-14	2026-01-13	

• A	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\boxtimes$	AGC-EM-A171	Attenuator	Mini-Circuits	UNAT-10A+	N/A	2024-02-01	2026-01-31		
$\boxtimes$	AGC-EM-E023	Artificial Mains Network	R&S	ESH2-Z5	100086	2025-05-08	2026-05-07		
$\boxtimes$	AGC-EM-E116	Test Receiver	R&S	ESCI	100034	2025-05-08	2026-05-07		

• F	Harmonic Current & Voltage Fluctuations and Flicker							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E033	Signal Conditioning Unit	Schaffner	CCN1000-1	72431	2025-05-16	2026-05-15	
	AGC-EM-E015	AC Source	Schaffner	NSG 1007	56825	2025-05-16	2026-05-15	

• E	ESD (Electrostatic Discharge)						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
$\boxtimes$	AGC-EM-E013	ESD Simulator	Schaffner	NSG 438	782	2024-11-12	2025-11-11

• E	EFT/Surge/DIPS (Fast Transients & Surges& Voltage dips and interruptions)								
Used	Used Equipment No. Test Equipment Manufacturer Model No. Serial No. Last Cal. Date (YY-MM-DD) (YY-MM-DD)								
$\boxtimes$	AGC-EM-E008	EFT/Surge/DIPS Generator	Schaffner	Modula 6150	34437	2025-05-08	2026-05-07		



Page 16 of 49

•	RS (Radio Frequency Electromagnetic Field)									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
	AGC-EM-E005	Power Meter	R&S	NRVD	8323781027	2025-03-24	2027-03-23			
$\boxtimes$	AGC-EM-E016	Power Amplifier	KALMUS	7100LC	04-02/17-06-001	2025-07-18	2026-07-17			
	AGC-EM-E028	Wideband Antenna	ETS-LINDGREN	3142C	60447	N/A	N/A			
	AGC-EM-E029	Antenna	ETS	3117	34609	2025-03-27	2026-03-26			
	AGC-EM-E035	Power Probe	R&S	URV5-Z4	100124	2025-03-24	2027-03-23			
	AGC-EM-E040	Directional Coupler	Werlatone	C5571-10	99463	2024-02-01	2026-01-31			
	AGC-EM-E041	Directional Coupler	Werlatone	C6026-10	99482	2024-02-01	2026-01-31			
	AGC-EM-E080	Power Amplifier	Rflight	NTWPA-2560100	17063183	2025-07-18	2026-07-17			
$\boxtimes$	AGC-EM-E115	Signal Generator	AGILENT	N5182A	MY49060745	2025-03-07	2026-03-06			
	AGC-EM-E160	Power Amplifier	TESEQ	CBA3G-100	T43913	2025-05-21	2026-05-20			

•	CS (Radio Frequency Common Mode)									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)			
$\boxtimes$	AGC-EM-A048	Attenuator	ZHINAN	E-002	N/A	2024-07-24	2026-07-23			
$\boxtimes$	AGC-EM-E005	Power Meter	R&S	NRVD	8323781027	2025-03-24	2027-03-23			
$\boxtimes$	AGC-EM-E017	Power Amplifier	AR	75A250	18464	2025-07-18	2026-07-17			
$\boxtimes$	AGC-EM-E035	Power Probe	R&S	URV5-Z4	100124	2025-03-24	2027-03-23			
	AGC-EM-E040	Directional Coupler	Werlatone	C5571-10	99463	2024-02-01	2026-01-31			
	AGC-EM-E115	Signal Generator	AGILENT	N5182A	MY49060745	2025-03-07	2026-03-06			
$\boxtimes$	AGC-EM-E161	CDN	3C TEST	CDN M2M3	ES064002624028	2024-09-25	2025-09-24			

● Test Software									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information				
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A				
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71				
$\boxtimes$	AGC-EM-S005	Harmonic/Flicker Test System	TCTEST	CTS 4	4.29.0				
$\boxtimes$	AGC-EM-S006	RS Test System	Tonscend	TS+ Ver2.1(JS35-RS)	2.0.1.8				
$\boxtimes$	AGC-EM-S007	CS Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS35-CS)	2.0.1.7				
$\boxtimes$	AGC-EM-S009	EFT/Surge/Dips 3 in 1 Test System	TCTEST	WinModula	2.31c				



Page 17 of 49


# 5. Measurement of Radiated Emissions at Frequencies up to 1GHz

### 5.1. Requirements

Test facility	Detector type/ bandwidth	Frequency Range (MHz)	Limits dB(µV/m)	Measurement specifications
SAC	Quasi-peak/	30 to 230	40	Instrumentation: CISPR 16-1-1, Clauses 4, 5 Antennas: CISPR 16-1-4, Clause 4.5
SAC	120kHz	230 to 1000	47	Test Site: CISPR 16-1-4, Clause 6 Method: CISPR 16-2-3, Clause 7.6

**Note:** The lower limit shall apply at the transition frequency.

## 5.2. Block Diagram of Test Setup

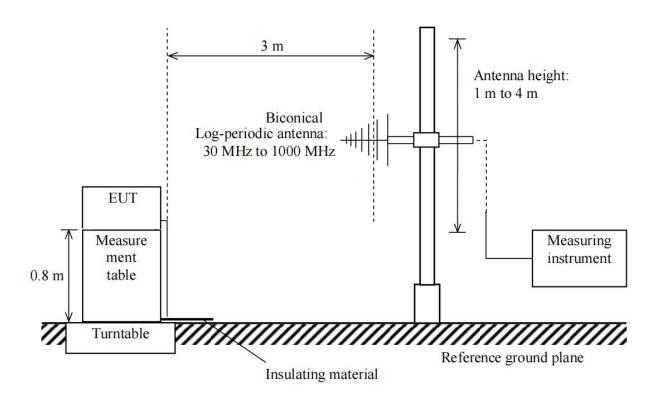



Page 18 of 49

## 5.3. Configuration of the EUT and method of measurement


- a. The EUT was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, the EUT was placed on the top surface of a measurement table, 0.8 m high from the horizontal reference plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 10 cm non-conductive covering to insulate the EUT from the ground plane.
- b. Support equipment, if needed, was placed as per CISPR 16-2-3.
- c. All I/O cables were positioned to simulate typical actual usage as per CISPR 16-2-3.
- d. The maximum receiving level of radiated emissions from the EUT was measured while the turntable was rotated from 0° to 360° and the antenna height was scanned between 1 m and 4 m. The cables were laid out to attain the maximum level of radiated emissions.
- e. The more description of the tests, the test methods, and the test set-ups are given in the applicable test standard.
- f. Record at least six highest emissions relative to the limits at each frequency of interest unless the emission is 10 dB or greater below the limit.
- g. A radiated emission is calculated by the following equation:
  - Measurement Level dB(μV/m) = Receiver reading dB(μV) + Factor(dB/m)
  - Factor(dB/m) = Antenna Factor(dB/m) + Cable Loss(dB)
  - Margin= Limit-Level




Page 19 of 49


### 5.4. Test Result

Test Equipment	Bamboo weather station	Model Name	MO6665
Test Engineer	Alex Yang	Temperature	22.1℃
Relative Humidity	56.4 %	Air Pressure	985 Mbar
Worst Mode	Mode 1	Power supply	DC 9V by adapter
Test Date	2025-07-14	Verdict	Pass

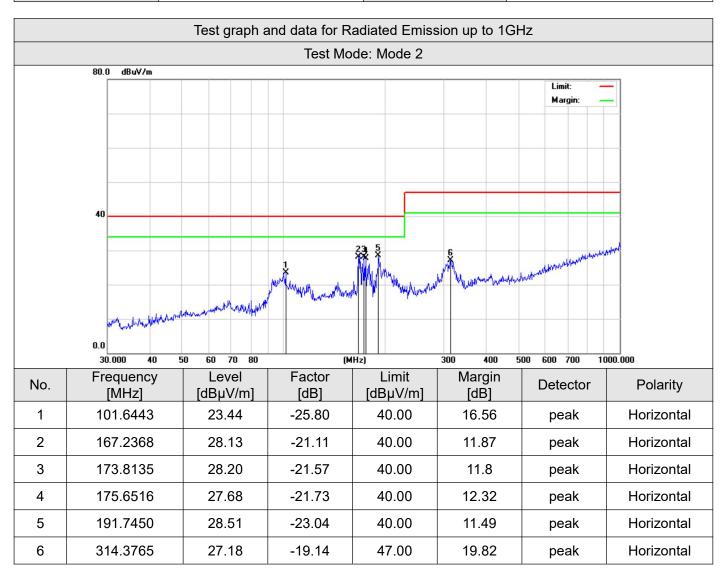





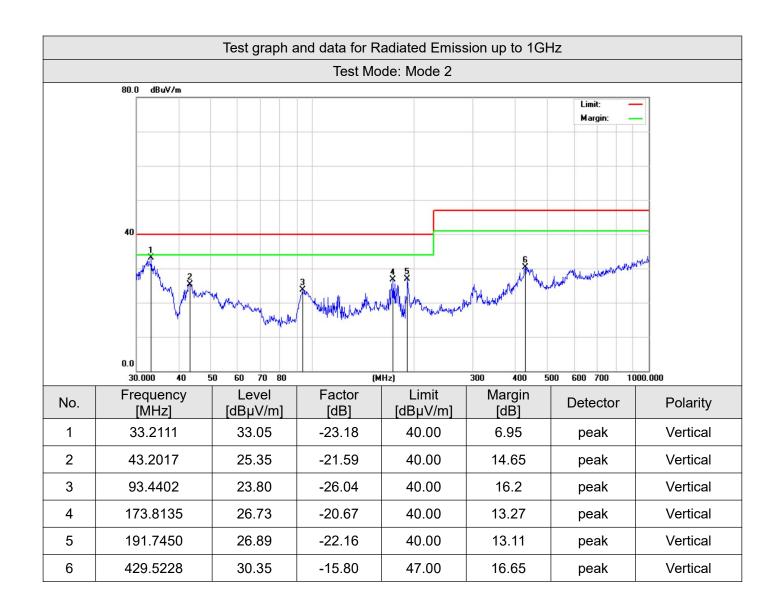



Page 21 of 49

# 6. Measurement of Conducted Emissions from the AC Mains Power Ports

### 6.1. Requirements


Requirements for conducted emissions, low voltage AC mains port

Network device	Detector type/ bandwidth	Frequency Range (MHz)	Limits dB(µV)	Measurement specifications
		0.15 to 0.5	66 to 56	
	Quasi-peak/ 9kHz	. 1 112102		Instrumentation: CISPR 16-1-1, Clauses 4, 5
AMN		5 to 30	60	and 7 Networks: CISPR 16-1-2, Clause 4
Alviin	Average/ 9kHz	0.15 to 0.5	56 to 46	Method: CISPR 16-2-1, Clause 7
		0.5 to 5	46	Set-up: CISPR 16-2-1, Clause 7
		5 to 30	50	

#### Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.5MHz.

## 6.2. Block Diagram of Test Setup

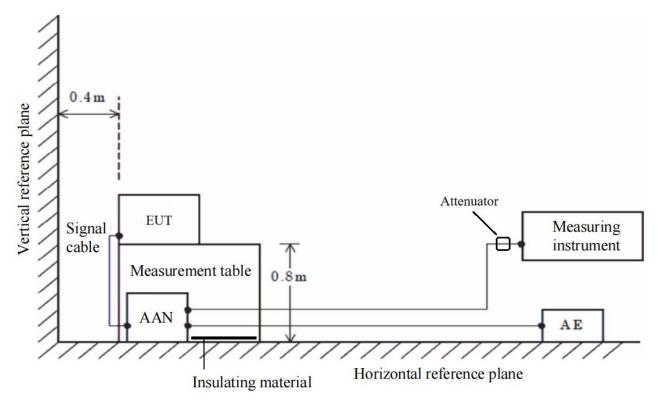



Page 22 of 49

## 6.3. Configuration of the EUT and method of measurement


- a. The EUT was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, the EUT was placed on the top surface of a measurement table, 0.8 m high from the horizontal reference plane, and was positioned at a distance of 0.4 m away from the vertical reference plane. When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 10 cm non-conductive covering to insulate the EUT from the ground plane.
- b. Support equipment, if needed, was placed as per CISPR 16-2-1.
- c. All I/O cables were positioned to simulate typical actual usage as per CISPR 16-2-1.
- d. The EMI receiver measured the emission levels emanating from the EUT into the AC Mains through an Artificial Mains Network (AMN) and an attenuator used on the front end of the EMI receiver. Testing included measurements on all live and neutral lines.
- e. The more description of the tests, the test methods, and the test set-ups are given in the applicable test standard
- f. Record at least six highest emissions relative to the limits at each frequency of interest unless the emission is 10 dB or greater below the limit.
- g. A conducted emission is calculated by the following equation:
  - Measurement Level (dBμV) = Receiver reading (dBμV) + Tansd (dB)
  - Transd(dB)= AMN Factor(dB)+Cable Loss(dB)+Attenuation(dB)
  - Margin= Limit-Level




Page 23 of 49

## 6.4. Test Result


Test Equipment	Bamboo weather station	Model Name	MO6665
Test Engineer	Kobe Chen	Temperature	23.5℃
Relative Humidity	67.3 %	Air Pressure	985 Mbar
Worst Mode	Mode 1	Power supply	DC 9V by adapter
Test Date	2025-08-01	Verdict	Pass

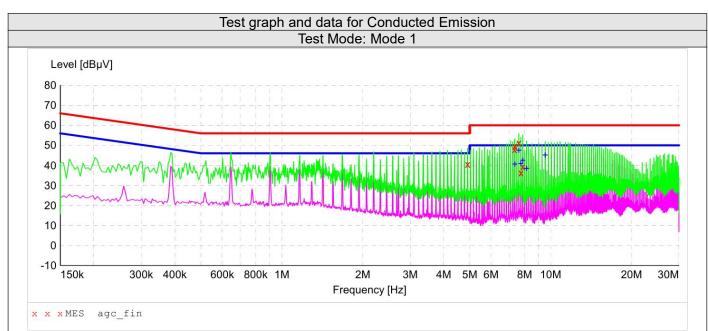

Frequency [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector	Line
4.906000	40.7	10.8	56.0	15.3	QP	L1
7.334000	51.6	11.4	60.0	8.4	QP	L1
7.358000	53.3	11.4	60.0	6.7	QP	L1
7.614000	54.9	11.5	60.0	5.1	QP	L1
7.742000	43.4	11.6	60.0	16.6	QP	L1
7.870000	46.5	11.6	60.0	13.5	QP	L1
7.354000	45.7	11.4	50.0	4.3	AV	L1
7.61400	46.70	57.6	50.0	3.3	AV	L1
7.742000	46.9	11.6	50.0	3.1	AV	L1
7.874000	46.7	11.6	50.0	3.3	AV	L1
8.130000	45.6	11.7	50.0	4.4	AV	L1
9.546000	45.0	12.1	50.0	5.0	AV	L1





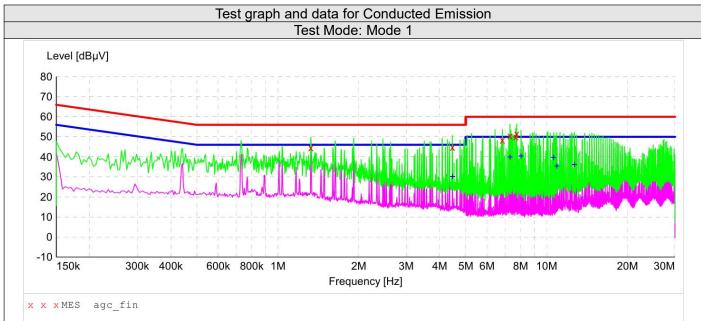

Frequency	Level	Factor	Limit	Margin	Detector	Line
[MHz]	[dBµV]	[dB]	[dBµV]	[dB]	Detector	Line
1.326000	44.6	10.4	56.0	11.4	QP	N
4.462000	44.9	10.7	56.0	11.1	QP	N
6.842000	48.5	11.3	60.0	11.5	QP	N
7.298000	50.5	11.4	60.0	9.5	QP	N
7.662000	50.1	11.6	60.0	9.9	QP	N
7.734000	51.6	11.6	60.0	8.4	QP	N
4.462000	30.0	10.7	46.0	16.0	AV	N
7.302000	39.8	11.4	50.0	10.2	AV	N
8.030000	40.3	11.7	50.0	9.7	AV	N
10.610000	39.7	12.4	50.0	10.3	AV	N
10.902000	35.3	12.4	50.0	14.7	AV	N
12.670000	36.0	12.8	50.0	14.0	AV	N



Page 25 of 49

## 7. Measurement of Harmonic Current Emissions

# 7.1. Requirements

Applicable test standard(s): EN IEC 61000-3-2:2019+A1:2021

### Limits of Harmonic Current Emissions

	Limits							
	Class A Class B		Class C <sup>a</sup>	Class D				
Harmonic order h	Maximum permissible harmonic current (A)		Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency (%)	Maximum permissible harmonic current per watt (mA/W)	Maximum permissible harmonic current (A)			
3	2.30	3.45	27 <sup>b</sup>	3.4	2.30			
5	1.14	1.71	10	1.9	1.14			
7	0.77	1.155	7	1.0	0.77			
9	0.40	0.6	5	0.5	0.40			
11	0.33	0.495	3	0.35	0.33			
13	0.21	0.315	3	3.85/13	0.21			
15≤ <i>h</i> ≤39(odd harmonics only)	2.25/h	3.375/h	3	3.85/h	2.25/h			
2	1.08	1.62	2					
4	0.43	0.645						
6	0.30	0.45	Not applicable	Not applicable	Not applicable			
8≤h≤40(even harmonics only)	1.84/h	2.76/h						

### Note:

The application of limits had been as defined in the applicable test standard.


<sup>(</sup>a) For some Class C products, other emission limits apply.

<sup>(</sup>b) The limit is determined based on the assumption of modern lighting technologies having power factors of 0.90 or higher.



Page 26 of 49

# 7.2. Block Diagram of Test Setup

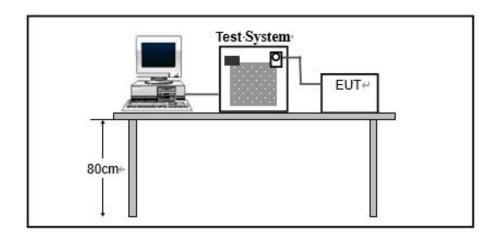



Page 27 of 49

## 7.3. Configuration of the EUT and method of measurement

- a. The test shall be conducted according to the general requirements given in the applicable test standard. The test duration had been as defined in the applicable test standard.
- b. The measurement of harmonic currents shall be performed as follows:
  - for each harmonic order, measure the 1.5 s smoothed RMS harmonic current in each discrete Fourier transform (DFT) time window;
  - calculate the arithmetic average of the measured values from the DFT time windows, over the entire observation period.
- c. The value of the active input power to be used for the calculation of limits shall be determined as follows:
  - measure the 1.5 s smoothed active input power in each DFT time window;
  - determine the maximum of the measured values of active power from the DFT time windows over the entire duration of the test.
- d. The harmonic currents and the active input power shall be measured under the same test conditions but need not be measured simultaneously.

### 7.4. Test Result

Equipment with a rated power less than or equal to 75W is deemed to fulfil all relevant requirements of this standard without testing.



Page 28 of 49

# 8. Measurement of Voltage Fluctuations and Flicker


## 8.1. Requirements

Applicable test standard(s): EN 61000-3-3:2013+A2:2021

Limits of Voltage Fluctuations and Flicker

Zimile of Voltage Fractional and Fraction								
Parameters	Definitions	Limits						
T <sub>max</sub>	the accumulated time value of $d(t)$ with a deviation exceeding 3.3 % during a single voltage change at the EUT terminals	≤500 ms						
d <sub>c</sub>	the maximum relative steady-state voltage change	≤3.3%						
d <sub>max</sub>	the maximum relative voltage change	⊠ ≤4% □ ≤6% □ ≤7%						
$\boxtimes P_{st}$	short-term flicker severity	≤1.0						
$\Box P_{lt}$	long-term flicker severity	≤0.65						

# 8.2. Block Diagram of Test Setup

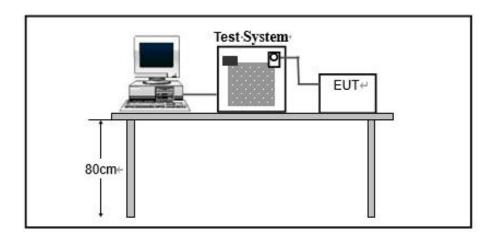



Page 29 of 49

# 8.3. Configuration of the EUT and method of measurement

- The test shall be conducted according to the general requirements given in the applicable test standard. The test duration and test condition had been as defined in the applicable test standard.
- All types of voltage fluctuations would been assessed by direct measurement using a flicker meter which complies with the specification given in IEC 61000-4-15:2010.

### 8.4. Test Result

Test Engineer	Carl Duan	Temperature	23.5℃
Test Date	2025-07-14	Air Pressure	985 Mbar
Worst Mode	Mode 1	Relative Humidity	67.3 %
Verdict	Pass		

Parameters	Measurement Value	Limits
T <sub>max</sub>	0	≤500 ms
d <sub>c</sub>	0.00	≤3.3%
d <sub>max</sub>	0.00	≤4%
P <sub>st</sub>	0.248	≤1.0




Page 30 of 49

# 9. Measurement of Electrostatic Discharge

## 9.1. Requirements

Port	Enclosure
Basic Standard	IEC 61000-4-2
Test Level	±8.0 kV (Air Discharge) ±4.0 kV (Contact Discharge) ±4.0 kV (Indirect Discharge)
Required Performance Criterion	В
Time Between Each Discharge:	1 second
Number of Discharge for Each Applied Voltage	10

## 9.2. Block Diagram of Test Setup

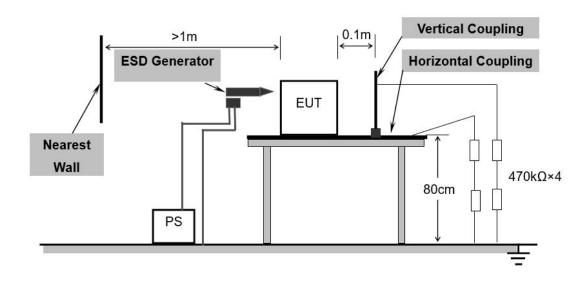



Page 31 of 49

### 9.3. Configuration of the EUT and method of measurement

- a. Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- b. The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- c. The time interval between two successive single discharges was at least 1 second.
- d. The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- e. Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- f. Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were completed.
- g. At least ten single discharges (in the most sensitive polarity) were applied to the Horizontal Coupling Plane at points on each side of the EUT. The ESD generator was positioned vertically at a distance of 0.1 meters from the EUT with the discharge electrode touching the HCP.
- h. At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the Vertical Coupling Plane in sufficiently different positions that the four faces of the EUT were completely illuminated. The VCP (dimensions 0.5m×0.5m) was placed vertically to and 0.1 meters from the EUT.
- i. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.





Report No.: AGC05443250712ER01 Page 32 of 49

## 9.4. Test Result

Test Engineer	Carl Duan	Temperature	20.8℃
Test Date	2025-07-16	Air Pressure	985 Mbar
Test Mode	Mode 1/2/3/4	Relative Humidity	51.3 %
Verdict	Pass		

Voltage	Coupling	Observation	Performance
±4kV	Contact Discharge	No degradation of performance	A
±2KV, ±4kV, ±8kV	Air Discharge	No degradation of performance	A
±4kV	Indirect Discharge HCP	No degradation of performance	А
±4kV	Indirect Discharge VCP	No degradation of performance	Α

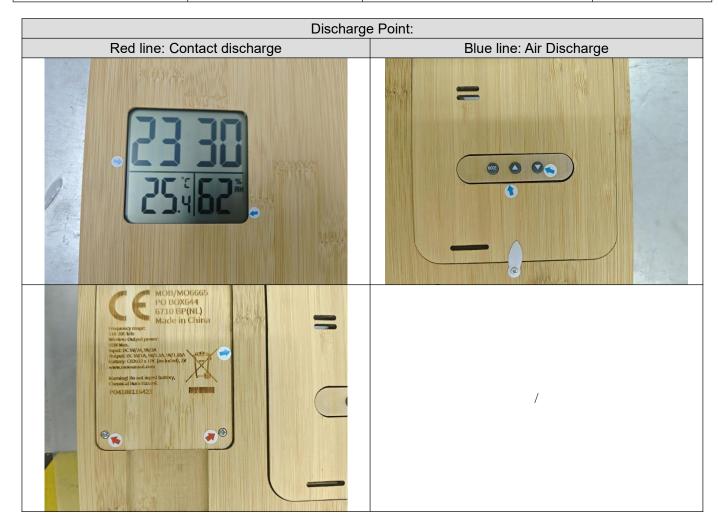





## 10. Measurement of Radio-Frequency Electromagnetic Field


### 10.1. Requirements

Port	Enclosure
Basic Standard	IEC 61000-4-3
Test Level	3V/m with 80% AM. 1kHz Modulation at 80 to 6000MHz
Required Performance Criterion	A
Antenna polarization	Vertical and Horizontal
Step size increment <sup>a</sup>	1%
Dwell time <sup>b</sup>	≤5 seconds
Test Distance	3m
EUT position facing antenna	Front side, back side, left side and right side

### Notes:

- a. Recognizing that a 1% step size is preferred, the frequency range can be swept incrementally with a step size not exceeding 4% of the previous frequency with a test level of twice the value of the specified test level in order to reduce the testing time for equipment requiring testing in multiple configurations and/or long cycle times.
- b. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond. However, the dwell time shall not exceed 5 seconds at each of the frequencies during the scan. The time to exercise the EUT is not interpreted as a total time of a program or a cycle but related to the reaction time in case of failure of the EUT.

# 10.2. Block Diagram of Test Setup

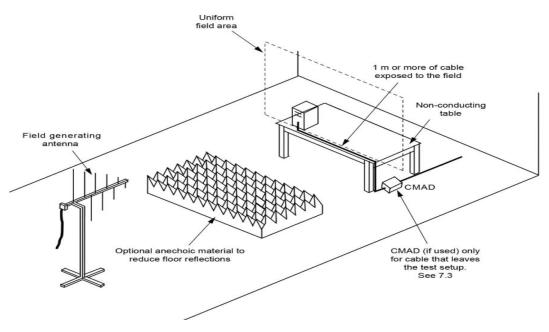



Page 34 of 49

# 10.3. Configuration of the EUT and method of measurement

- a. The Equipment Under Test (EUT) was positioned within the Uniform Field Area (UFA) on a supporting table, ensuring a 3-meter separation from the transmitting antenna. This setup aligns with the calibrated square area, guaranteeing field uniformity during testing. The supporting units were strategically located outside the UFA to avoid any potential interference. Nonetheless, the cables connected to the EUT were intentionally exposed to the precisely calibrated field within the UFA.
- b. Before testing, it will verify the proper operation of the test equipment/system. This verification will involve measuring the field strength at one point within the Uniform Field Area (UFA) at various frequencies.
- c. The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- d. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.



Page 35 of 49

## 10.4. Test Result

Test Engineer	Alex Yang	Temperature	<b>22.4</b> ℃
Test Date	2025-07-15	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2/3/4	Relative Humidity	57.9 %
Verdict	Pass		

Frequency (MHz)	Polarity	Exposed Side	Field Strength (V/m)	Observation	Performance
80-6000		Front	3V/m (rms)	No performance degradation	Α
80-6000	Vertical	Left	3V/m (rms)	No performance degradation	Α
80-6000	vertical	Rear	3V/m (rms)	No performance degradation	Α
80-6000		Right	3V/m (rms)	No performance degradation	Α
80-6000		Front	3V/m (rms)	No performance degradation	Α
80-6000	Horizontal	Left	3V/m (rms)	No performance degradation	Α
80-6000	Honzoniai	Rear	3V/m (rms)	No performance degradation	Α
80-6000		Right	3V/m (rms)	No performance degradation	А



Page 36 of 49

# 11. Measurement of Radio-Frequency Common Mode


### 11.1. Requirements

Dart			
Port	☐ DC power ports <sup>a</sup>		
Basic Standard	IEC 61000-4-6		
Required Performance Criterion	A		
Test Level	0.15 to 80 MHz, 3V RMS (unmodulated), 80 % AM (1 kHz)		
Step size increment b	1%		
Dwell time <sup>c</sup>	≤5 seconds		

#### Notes:

- a. Applicable only to ports which, according to the manufacturer's specification, supports cable lengths greater than 3 m.
- b. Recognizing that a 1% step size is preferred, the frequency range can be swept incrementally with a step size not exceeding 4% of the previous frequency with a test level of twice the value of the specified test level in order to reduce the testing time for equipment requiring testing in multiple configurations and/or long cycle times.
- c. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised and to be able to respond. However, the dwell time shall not exceed 5 seconds at each of the frequencies during the scan. The time to exercise the EUT is not interpreted as a total time of a program or a cycle but related to the reaction time in case of failure of the EUT.

## 11.2. Block Diagram of Test Setup

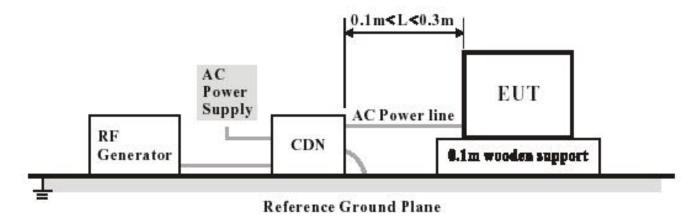



Page 37 of 49

# 11.3. Configuration of the EUT and method of measurement

- a. The Equipment Under Test (EUT) shall be tested within its intended operating and climatic conditions.
- b. The test generator and the coupling/decoupling network shall be placed directly on, and bonded to, the ground reference plane. The test shall be performed with the test generator connected to each of the coupling devices (CDN, EM clamp, current clamp) in turn. All other cables not under test shall either be disconnected (when functionally allowed) or provided with decoupling networks or unterminated CDNs only.
- c. The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- d. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

#### 11.4. Test Result

Test Engineer	Ikun Yu	Temperature	20.8℃
Test Date	2025-07-16	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2/3/4	Relative Humidity	51.3 %
Verdict	Pass		

Test port	Test Level	Coupling method	Observation	Performance
AC Power Input	3V	CDN	No performance degradation	A



Report No.: AGC05443250712ER01 Page 38 of 49


## 12. Measurement of Electrical Fast Transient/Burst

### 12.1. Requirements

Dort	⊠ AC mains power ports	☐ signal, wired network and control ports <sup>a</sup>	
Port	☐ DC power ports <sup>a</sup>		
Basic Standard	IEC 61000-4-4		
Required Performance Criterion	В		
	AC mains power ports 1 kV	(peak)	
Test Level	signal, wired network and control ports: 0.5 kV (peak)		
	DC power ports: 0.5 kV (peak)		
Polarity	Positive/Negative		
Impulse Frequency	5kHz		
Impulse wave shape	5/50ns		
Burst Duration	15ms		
Burst Period	300ms		
Notes:			

 Applicable only to ports which, according to the manufacturer's specification, supports cable lengths greater than 3 m.

## 12.2. Block Diagram of Test Setup

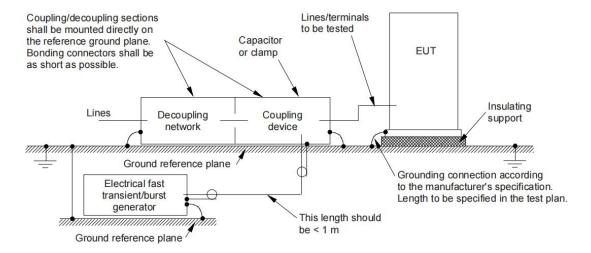



Page 39 of 49

# 12.3. Configuration of the EUT and method of measurement

- a. The Equipment Under Test (EUT), whether stationary floor-mounted or table top, and equipment designed to be mounted in other configurations, shall be placed on a ground reference plane and shall be insulated
- b. from it by an insulating support  $0.1 \text{ m} \pm 0.01 \text{ m}$  thick.
- c. The test generator and the coupling/decoupling network shall be placed directly on, and bonded to, the ground reference plane.
- d. The EUT shall be arranged and connected to satisfy its functional requirements, according to the equipment installation specifications. The minimum distance between the EUT and all other conductive structures (e.g. the walls of a shielded room), except the ground reference plane shall be more than 0,5 m. All cables to the EUT shall be placed on the insulation support 0,1 m above the ground reference plane. Cables not subject to electrical fast transients shall be routed as far as possible from the cable under test to minimize the coupling between the cables.
- e. The test voltages shall be coupled to all of the EUT ports including those between two units of equipment involved in the test, unless the length of the interconnecting cable makes it impossible to test.
- f. Either a direct coupling network or a capacitive clamp shall be used for the application of the test voltages.
- g. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

### 12.4. Test Result

Test Engineer	Ikun Yu	Temperature	21.6℃
Test Date	2025-07-16	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2/3/4	Relative Humidity	51.9 %
Verdict	Pass		

Inject Line	Voltage(kV)	Inject Method	Observation	Performance
AC Lines	0.5, 1	Direct	No degradation of performance	Α



Page 40 of 49

# 13. Measurement of Surges

### 13.1. Requirements

Port	⊠ AC mains power ports <sup>a</sup>	
Basic Standard	IEC 61000-4-5	
Required Performance Criterion	В	
Test Level	Line to line: 1 kV; Line to ground: 2 kV	
Tr/Th	1.2/50 (8/20) µs	
Number of impulses	Five positive and five negative impulses	
Time between successive impulses	1 min	

### Notes:


- a. The number of pulses applied shall be as follows:
  - Five positive pulses line-to-neutral at 90° phase.
  - Five negative pulses line-to-neutral at 270° phase.

The following additional pulses are required only if the EUT has an earth connection or if the EUT is earthed via any AE:

- Five positive pulses line-to-earth at 90° phase.
- Five negative pulses line-to-earth at 270° phase.
- Five negative pulses neutral-to-earth at 90° phase.
- Five positive pulses neutral-to-earth at 270° phase.
- Defined as an antenna port, a wired network port, or a broadcast receiver tuner port.

Typical ports covered include xDSL, PSTN, CATV, antenna and similar. Excluded ports are LAN and similar.

### 13.2. Block Diagram of Test Setup

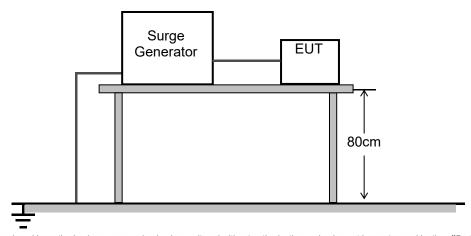



Page 41 of 49

## 13.3. Configuration of the EUT and method of measurement

- a. Verification shall be performed. It is preferable to perform the verification prior to the test.
- b. The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- c. When testing line-to-ground, the lines are tested individually in sequence, if there is no other specification.
- d. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore, all lower test levels including the selected test level shall be tested.
- e. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

### 13.4. Test Result

Test Engineer	Ikun Yu	Temperature	21.6℃
Test Date	2025-07-16	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2/3/4	Relative Humidity	51.9 %
Verdict	Pass		

Test port	Coupling	Voltage(kV)	Observation	Performance
AC Mains Input	line-to-neutral	0.5, 1	No degradation of performance	Α



Page 42 of 49

# 14. Measurement of Voltage Dips and Interruptions


### 14.1. Requirements

Port	AC mains power ports				
Basic Standard	IEC 61000-4-11				
Required Performance Criterion	В С				
Residual voltage <sup>a</sup>	< 5 %	70 %	< 5 %		
Number of cycles <sup>b</sup>	0.5	25 for 50 Hz 30 for 60 Hz	250 for 50 Hz 300 for 60 Hz		
Variation/dip repetition Sequence of three dips/interruptions with an interval of 10 seconds test		al of 10 seconds between each			

### Notes:

- a. Changes to occur at 0 degree crossover point of the voltage waveform. If the EUT does not demonstrate compliance when tested with 0 degree switching, the test shall be repeated with the switching occurring at both 90 degrees and 270 degrees. If the EUT satisfies these alternative requirements, then it fulfils the requirements.
- b. Apply at only one supply frequency of the EUT.

# 14.2. Block Diagram of Test Setup

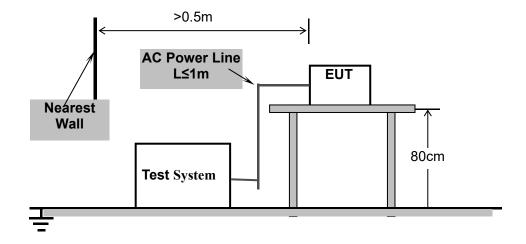



Page 43 of 49

# 14.3. Configuration of the EUT and method of measurement

- a. The test shall be performed according to the above requirements and block diagram which shall specify the test setup.
- b. The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance criterion defined in the report.

### 14.4. Test Result

Test Engineer	Ikun Yu	Temperature	21.6℃
Test Date	2025-07-16	Air Pressure	985 Mbar
Test Mode(s)	Mode 1/2/3/4	Relative Humidity	51.9 %
Verdict	Pass		


Test port	Residual voltage (%)	Cycles	Observation	Performance
	< 5	0.5	No degradation of performance	А
AC Mains Input	70	25	No degradation of performance	Α
	< 5	250	EUT power cycled	В




# **Appendix I: Photographs of Test Setup**



Conducted emissions from the AC mains power ports

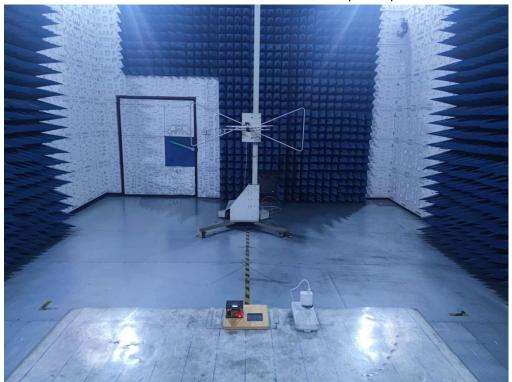

Radiated emissions at frequencies up to 1GHz









Harmonic Current Emissions & Voltage Fluctuations and Flicker




Electrostatic Discharge






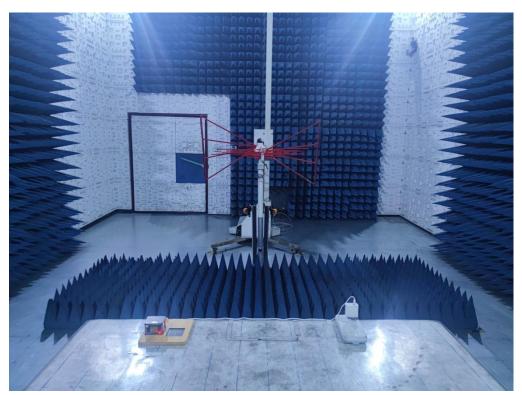

Radio-Frequency Electromagnetic Field up to 1 GHz

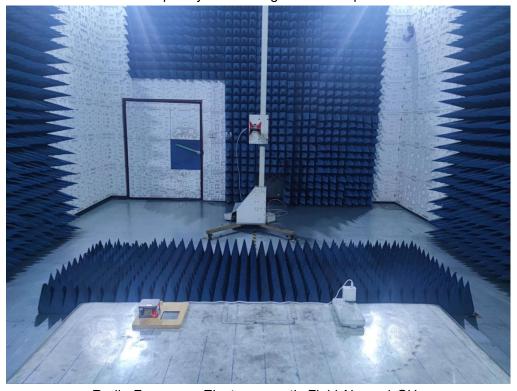

Radio-Frequency Electromagnetic Field Above 1 GHz







Radio-Frequency Common Mode at the AC Mains Power Ports



Fast Transients/Surges/ Voltage dips at the AC mains power ports



Page 48 of 49

# **Appendix II: Photographs of Test EUT**

Refer to the Report No.: AGC05443250712AP01



Page 49 of 49

# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

  7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

### ----End of Report----